



## Acoustic, fast track floor prep system for ALL resilient floor coverings!

Recommended by reputable floor covering producers E.G AMTICO

- Instant dry floor levelling of most substrates
- A cost effective solution to problem floors
- Exceptionally stable, free floating underlay system
- Provides a super smooth finish
- Ready for glue-down of all resilient and carpets
- Excellent sound reduction of 23 dB  $\Delta L_w$
- Quick and easy to fit and to handle (pack sizes)

JUMPAX® is suitable for glue-down of all resilient floorings, such as sheet vinyl, LVT's, linoleum, cork, rubber and also carpet and carpet tiles. JUMPAX® is used in both commercial and domestic situations. It can be used over almost any type of floor construction as well as under floor heating systems.

This unique product is only 10mm thick, requires only basic tools and skills, but produces a highly professional smooth finish. It provides the solution to a whole range of problems associated with traditional surface preparation methods.

The two self-adhesive components are quickly and easily laid as a free-floating subfloor, instantly smoothing over typical irregularities and eliminating the need for screeds, primers, ply boards and nails. It is not necessary to remove old floor coverings, loosening screeds or surface contamination.

Failures of new floors due to problem substrates, minor cracks or laitance become a thing of the past. Using the JUMPAX system not only saves considerable time and money, but also removes any risk of damage to pipes and cables in the floor. Of course, the whole installation can be removed just as easily, without any damage to the original floor finish, should this be required.

\* This improvement is obtained on a concrete floor with an attached screed\*\*.

\*\* In a floating screed situation, the noise reduction of the composed top floor always depends on the impact noise reduction of floating screed system in place.

|   |  |  |  |
|---|--|--|--|
| Building Regulations Approved<br>Doc "E" (England and Wales) 2003<br>Conversions<br>New build | Airborne Noise<br>DnTw + Ctr<br>43 dB or greater<br>43 dB or greater | Impact Noise<br>L'nT,w<br>64 dB or less<br>62 dB or less | Impact Sound<br>reduction $\Delta L_w$<br>17 dB $\Delta L_w$<br>19 dB $\Delta L_w$ |
| Building Standards Part H<br>(Scotland) 1990 (as amended)<br>New Build and Conversions        | Airborne Noise<br>DnTw<br>52 dB (or greater)                         | Impact Noise<br>L'nT,w<br>61 dB (or less)                | Impact noise<br>reduction $\Delta L_w$<br>17 dB $\Delta L_w$                       |
| Jumpax result BS-EN-ISO 717-2: 1997   | Rw(C;Ctr)= 58 (-1;-5) dB   | Ln,w(CI)= 53 (1) dB                                      | $\Delta L_w = 23$ dB   |



**unifloor**  
UNDERLAY SYSTEMS BV

# Products specifications

## Technical data


|  |                                 |
|--|---------------------------------|
| Article number JUMPAX® system  | 136.000                         |
| Article number JUMPAX® border tiles                                      | 136.100                         |
| Article number JUMPAX® top boards  | 136.200                         |
| Thickness / Tolerance (mm)   | 10 / ± 0,2                      |
| Measurement / Tolerance (mm/m <sup>1</sup> )                             | 600 x 1200 / ± 1.5              |
| Raw Material   | MDF, Polystyrene, aluminum film |
| Density (kg/m <sup>3</sup> )   | 585                             |
| Colour   | Natural / Silver                |
| Sound Reduction EN-ISO 10140 / 717-2 with 2 mm linoleum                  | 23 dB $\Delta L_w$              |
| with 2 mm LVT (PVC)  | 21 dB $\Delta L_w$              |
| TNO Report no.   | MON-RPT-2010-02457              |
| SRL Report no.   | C/06/5L/3648/1a                 |
| CSTB Report no.  | AC09-26021878                   |
| Bending Strength (kg/cm <sup>2</sup> )                                   | > 40                            |
| Fire Class, EN 13501-1:2007: with a 2 mm PVC measured from the top:      | B <sub>FL,s1</sub>              |
| Fire Class, EN 13501-1:2007: with a 2 mm Linoleum measured from the top: | C <sub>FL,s1</sub>              |
| Fire Class, EN 13501-1:2007: nude test from the top:                     | D <sub>FL,s1</sub>              |
| Humidity (%)   | 4 - 10                          |
| Swelling after 24 hours in water, max. (%)                               | < 40                            |
| Thermal resistance (R <sub>m</sub> value) [m <sup>2</sup> .K/W]          | 0,13                            |
| TOG  | 1,3                             |
| Formaldehyde degree  | E - 1                           |

## Packaging

|                           |   |
|---------------------------|---|
| Installation instructions | Present                                       |
| Package contents          | 4 base- and 4 topboards / 2.88 m <sup>2</sup> |
| Pallet contents           | 48 packs / 138.24 m <sup>2</sup>              |
| Pallet size (lxbxh mm)    | 1200 x 1200 x 1100                            |
| Pallet weight             | 895 kg  |

## Application

Acoustic, fast track subfloor preparation system for the immediate glue-down of all resilient floorings, such as sheet vinyl, LVT's, linoleum, cork, rubber and also carpet and carpet tiles.

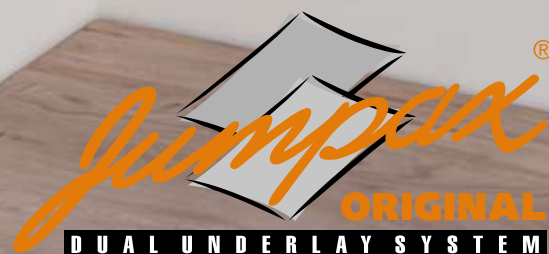

## Package contents

# 4/4

- 4 base- and 4 topboards
- 600 x 1200 mm
- 2,88 m<sup>2</sup>

**Thickness 10 mm**



**Scan the QR-Code for the installation manual of Jumpax® Original!**



[facebook.com/jumpax24](https://facebook.com/jumpax24)



[youtube.com/watch?v=JBI9ekYNfFE](https://youtube.com/watch?v=JBI9ekYNfFE)



**UK Toll Free Number**  
T 0845 603 0 906