



ROCKWOOL®

FIREPRO®

**60mm Ablative
Coated Batt**

Firestopping solution for large voids
in walls and floors

60mm Ablative Coated Batt


Firestopping solution for large voids in walls and floors

As part of the comprehensive FIREPRO® range of fire protection products, the ROCKWOOL Ablative Coated Batt is intended to act as an airseal barrier to reinstate the fire resistance and acoustic performances of concrete floors, masonry walls and dry wall systems when voids have been created for the passage of services. This includes pipes made of plain or stainless steel, cast iron, copper, polypropylene (PP), high density polythene (HDPE), PVC and ABS along with ductwork and dampers and a wide range of cable types (both sheathed and un-sheathed, supported on both trays and ladders).

Ablative Coated Batts can also be used as a 'head-of-wall' barrier to extend the fire resistance and acoustic performances of masonry walls that finish at suspended ceiling height, up to the concrete soffit above. Voids of up to 20m in length and 1.2m in height can be sealed. In addition, blank seals of up to 2400mm x 2400mm* can be formed in either dry walls or masonry walls, or up to 600mm x 600mm in concrete floors.

In response to this growing and increasingly important market, ROCKWOOL has re-designed and tested the product to the dedicated fire resistance standard for penetration seals - prEN 1366-3. Due to its specific nature, this document is intended to supersede the traditional BS 476: Parts 20 and 22 previously used for fire seal testing in the UK construction market.

The tests have proved the capability of a single 60mm Batt to provide up to 4 hours fire resistance integrity and up to 2 hours insulation when used with all of the services listed above and also as a blank seal. Even for extreme requirements, where 4 hours integrity and insulation are required to maintain the performance of a masonry wall, a solution can also be accomplished with a double Batt solution.

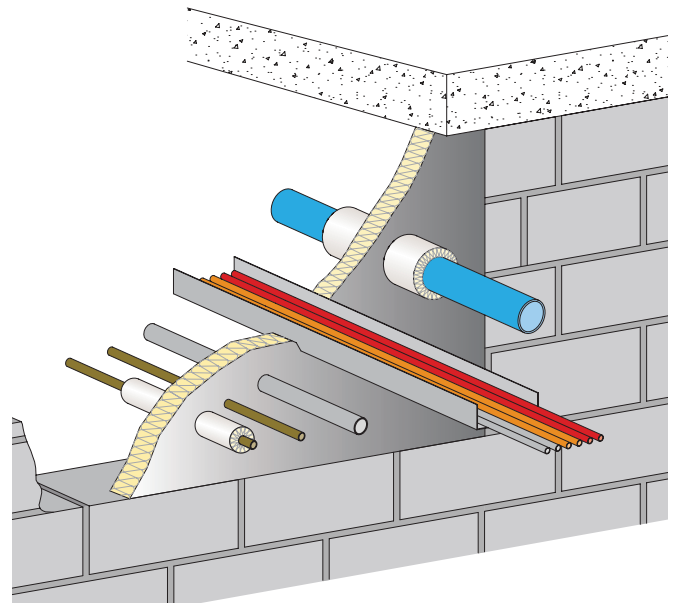

General benefits:


- Excellent fire resistance from single thickness Batt
- Standard size: 1200 x 600 x 60mm
- Suitable for sealing large wall and floor voids containing most commonly used services
- Can be used as a blank seal and a head of wall seal
- Lightweight and simple installation
- Maintenance free
- 180kg/m³ density base material provides additional benefits of a smoke and acoustic seal
- Tested for air tightness

* Please contact ROCKWOOL Technical Services for further details.



The following NBS Plus clauses include 'Ablative Coated Batt': P12-41, P12-325, P12-360, P12-365

Performance & properties

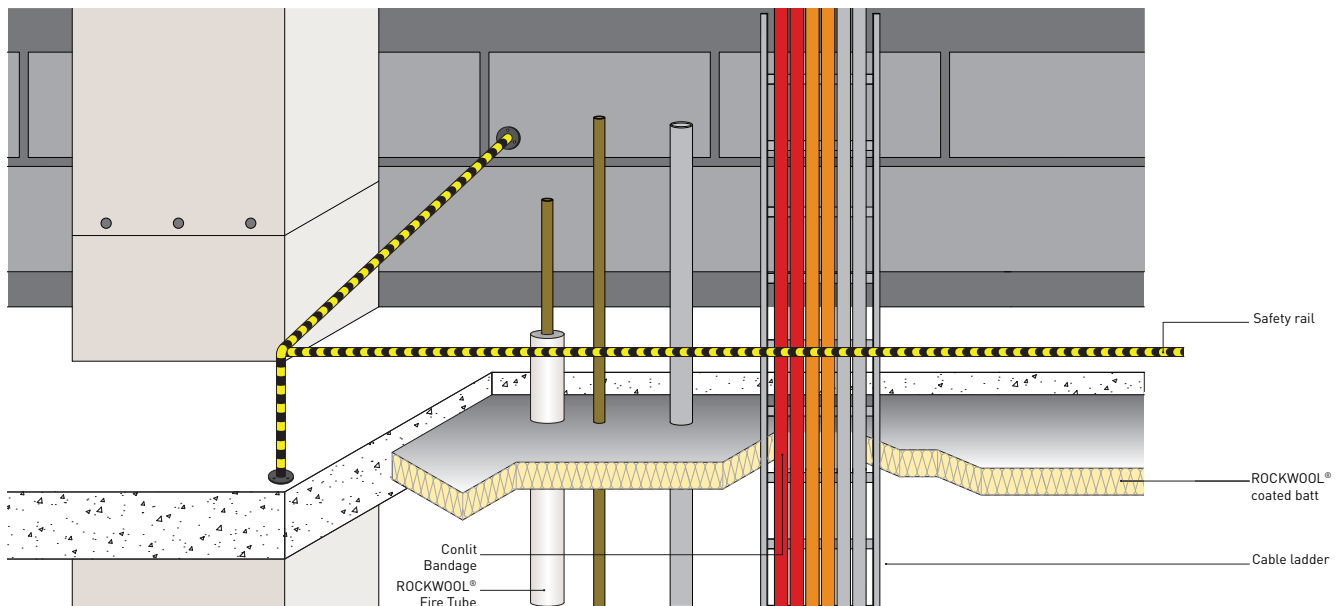

Installation

FIREPRO® Ablative Coated Batts are manufactured by spraying specially produced, high density ROCKWOOL insulation with an additional fire protection ablative coating. This is a fully automated process to ensure an even thickness of coating.

To install, the Batts are simply cut and a bead of Acoustic Intumescent Sealant applied around the external edges. They are then friction fitted between the services and the wall or floor edges to completely seal the void. Where butt joints are required between cut sections of adjacent batts, Acoustic Intumescent Sealant and/or FIREPRO® Glue is applied to both mating edges in order to form a fire tight bond between individual pieces of insulation. Contact the Technical Solutions team on 0871 222 1780 for specific details on blank seals and dampers.

All joints, including those around the perimeter of the Batt, are then pointed with FIREPRO® Acoustic Intumescent Sealant to complete the seal.

Plastic pipes (PVC, ABS and HDPE etc) must be sleeved with FIREPRO® Insulated Fire Sleeves at the point at which they pass through the Ablative Coated Batt. Similarly, to achieve fire resistance insulation (I) with metal pipes such as steel or copper, the pipes must be lagged with a 1m length of ROCKWOOL Fire Tube or Pipe Section (minimum 40mm wall thickness) protruding equal distances from both faces of the Ablative Coated Batt. The joint between the Ablative Coated Batt and the pipe insulation must be pointed with the FIREPRO® Sealant. Where the pipe has been thermally lagged with a combustible insulation, this must be cut away and replaced with the ROCKWOOL insulation, as above. Ensure the integrity of any vapour control layer is re-instated as necessary. The joint between the Batt and Fire Sleeve or Fire Tube must be pointed with the FIREPRO® Sealant.

Load-bearing seals

FIREPRO® Ablative Coated Batts are not intended for use as load-bearing seals. Where a load-bearing seal is required, ROCKWOOL Firestop Compound should be considered.

Fire performance

ROCKWOOL Ablative Coated Batt has been tested to the dedicated fire resistance standard for penetration seals - prEN 1366-3. The independently prepared assessment, detailing the full scope of fire performance, is available from the ROCKWOOL Technical Solutions Team. Ablative Coated Batt fire resistance tests were conducted using ROCKWOOL Acoustic Intumescent Sealant and/or ROCKWOOL FIREPRO® Glue.

Acoustic data

Tested for head of wall:

- Rw= up to 52db (2 x Coated Batts)
- Rw= up to 38db (1 x Coated Batts)

The correct use of Coated Batt within concealed cavities and voids will reduce the level of transmitted sound:

- Rw= up to 52 db (2 x Coated Batts) – incorporating 48mm O/D PVC /15mm copper pipe penetrations.
- Rw= up to 34 db (1x Coated Batts) – incorporating 48mm O/D PVC /15mm copper pipe penetrations.

Further acoustic test data is available for use in facefix applications. Contact our Technical Solutions Team.

Technical advice

For specific integrity and insulation ratings for the various services, please consult ROCKWOOL Standard Details, available via our Technical Solutions team.

Health and Safety

In accordance with REACH health and environment regulations, there are no hazardous classifications associated with ROCKWOOL mineral wool in respect to physical, health and environmental considerations.

More information

ROCKWOOL Limited reserves the right to alter or amend the specification of products without notice as our policy is one of constant improvement. The information contained in this data sheet is believed to be correct at the date of publication.

Interested?

For further information, contact the Technical Solutions Team on 0871 222 1780 or email info@rockwool.co.uk

Visit www.rockwool.co.uk to view our complete range of products and services.

ROCKWOOL Limited
Pencoed
Bridgend
CF35 6NY

info@rockwool.co.uk
www.rockwool.co.uk