
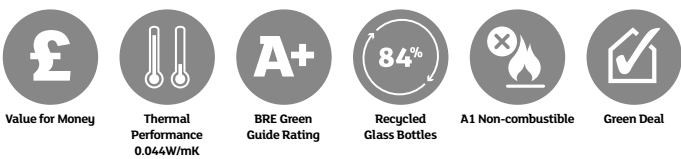
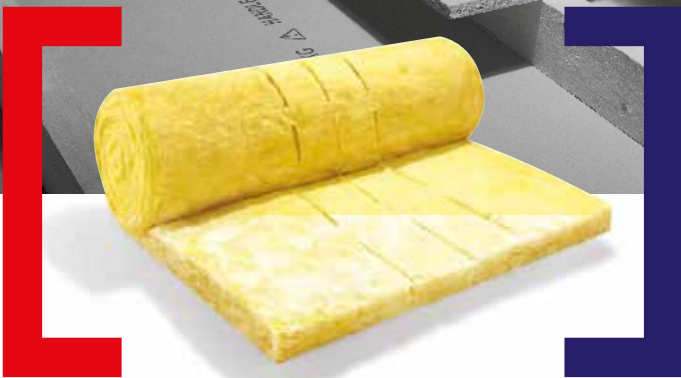


# Multi-Roll 44

Data Sheet | September 2014

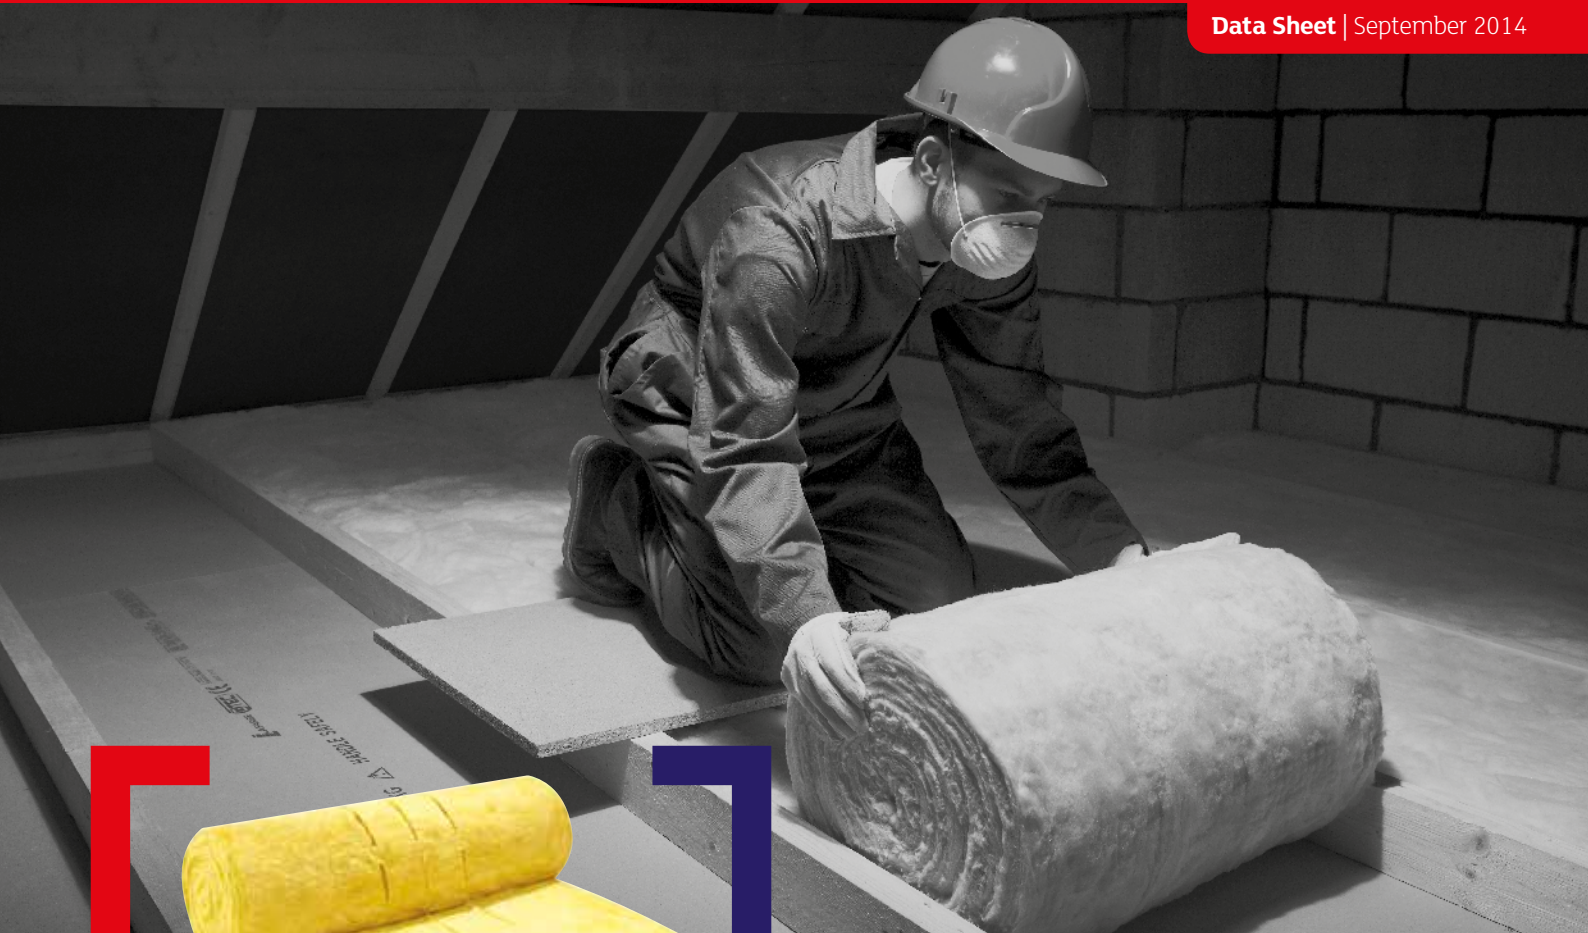

**Multi-Roll 44** is a lightweight, glass wool roll, designed to provide thermal insulation in lofts. The roll may be split to allow the user the choice of any of the three commonly required widths.

**Multi-Roll 44** is strong, flexible and resilient.

Product dimensions and information					
Thickness (mm)	Length (m)	Width (mm)	Area (m <sup>2</sup> )	R-Value (m <sup>2</sup> K/W)	Code
60	15.00	1200, 2x600, 3x400	18.00	1.35	5860*
80	11.25	1200, 2x600, 3x400	13.50	1.80	5880*
100	10.10	1200, 2x600, 3x400	12.12	2.25	5774
150	6.65	1160, 2x580, 3x386	7.71	3.40	5773
170	5.80	1160, 2x580, 3x386	6.73	3.85	5772
200	4.85	1160, 2x580, 3x386	5.63	4.50	5771

24 rolls per pallet


\*Non-Standard Products

U-Values			
U-Value (W/m <sup>2</sup> K)	0.16	0.14	0.12
Thickness of insulation between joists (mm)	100	100	150
Thickness of insulation over joists (mm)	170	200	200

Typical U-Values achieved when using Multi-Roll 44 in a standard loft application

# Multi-Roll 44 | Typical Application

## Lofts - Insulating between joists

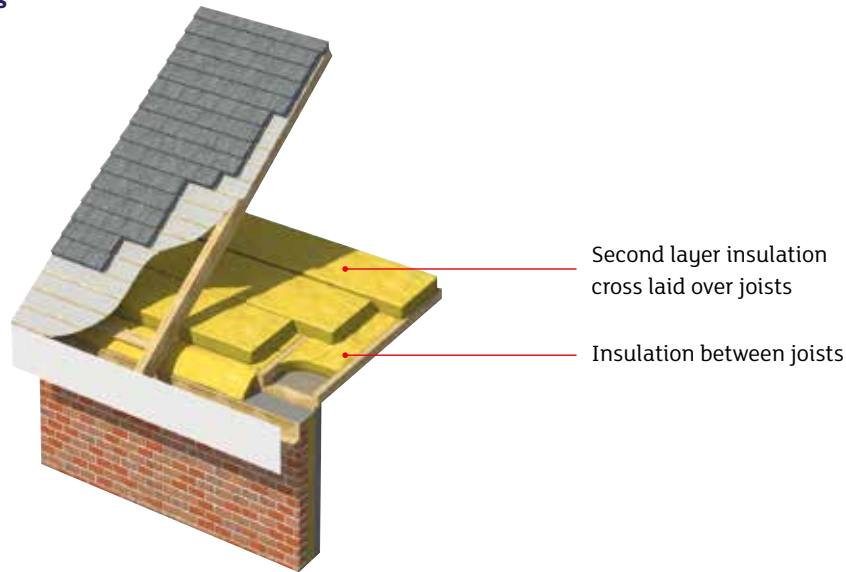

### Thermal Performance

Multi-Roll 44 has a thermal conductivity of 0.044W/mK.

### Environmental

Multi-Roll 44 is classified as having zero ODP (Ozone Depletion Potential) and zero GWP (Global Warming Potential). They are also CFC and HCFC free.

### Durability

Multi-Roll 44 is non-hygroscopic, will not rot, degrade or sustain vermin and will not encourage the growth of mould, bacteria or fungi.

### Standards

Multi-Roll 44 is manufactured in accordance with BS EN 13162: 2012, BS EN 13172: 2012 and ISO 9001 Quality Management Systems. Also manufactured to comply with the requirements of CE Marking 93/68/EEC.

### Fire Classification

Multi-Roll 44 is classified as non-combustible with a Reaction to Fire Classification A1 when tested to BS EN 13501-1.

### Vapour Resistance

Multi-Roll 44 possess negligible vapour resistance allowing vapour to pass freely through the insulation.

### Handling & Storage

Multi-Roll 44 is supplied compression packed in polythene to provide short term protection and for long term protection, the product must be stored indoors or under a waterproof covering in order to protect against weather damage. Multi-Roll 44 should not be left permanently exposed to the elements.

### Associated Products

Multi-Roll 40

### Superglass Certification



### Superglass Insulation Limited

Thistle Industrial Estate, Kerse Road, Stirling, Scotland FK7 7QQ

#### TECHNICAL

Hotline: 0844 381 4022

Email: [technical@superglass.co.uk](mailto:technical@superglass.co.uk)

Fax: 01786 451245

#### SALES

Tel: 01786 402013 / 01786 402014

01786 402015 / 01786 402016

Email: [sales@superglass.co.uk](mailto:sales@superglass.co.uk)

Fax: 01786 451245

[www.facebook.com/superglassinsulationltd](https://www.facebook.com/superglassinsulationltd)

[www.twitter.com/superglassins](https://www.twitter.com/superglassins)

[www.linkedin.com/company/superglass-insulation-ltd](https://www.linkedin.com/company/superglass-insulation-ltd)

For further information, product sheets, alternative dimensions or facings please contact the Technical Hotline on 0844 381 4022.

Please note - all dimensions are nominal.

Your insulation team  
**Superglass**