




WIRED TILE BATTEN BARRIER

Fire stopping between roof covering and underside of tiles

- » Provides fire stopping between roof tiles and roof membrane
- » Complies with NHBC 2017 7.2.16
- » Quickly and easily installed as the tile battens are fitted
- » Manufactured from non-combustible wire reinforced rockfibre mineral wool insulation
- » Use as part of the ARC Party Wall System to create a complete party wall fire stopping solution

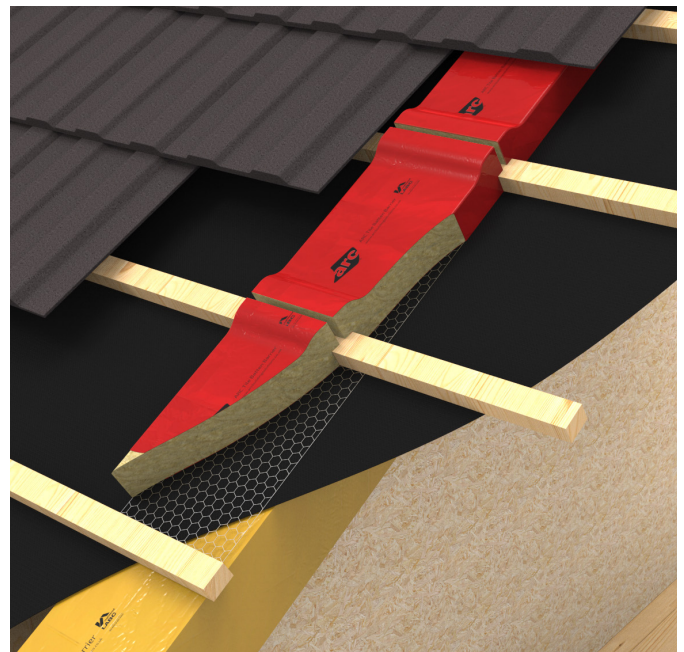

WIRED TILE BATTEN BARRIER




Installation

The ARC Wired Tile Batten Barrier is supplied in 1250mm lengths and are supplied baled to minimise waste packaging and offer easy handling on site

Installation is carried out as the tile battens are fixed, after the roof covering has been fitted.

- » Position the ARC Wired Tile Batten Barrier at the party wall line above the roof covering and before the tile battens are fitted
- » Use a knife to cut through the insulation of the ARC Wired Tile Batten Barrier in line with the leading (top) edge of the tile batten. You should not cut through the wire mesh, and care must be taken to not damage the roof covering underneath
- » Work the tile batten into the cut in the insulation. The lower edge of the tile batten should be covered by insulation as shown. This ensures that the gap between the batten and underside of the roof tile, once fitted, are filled
- » Before moving on, check the insulation has recovered to a height that will fill to the back of the roof tile when fitted. Where necessary, work the material so that no gaps will remain once the tiles have been fitted

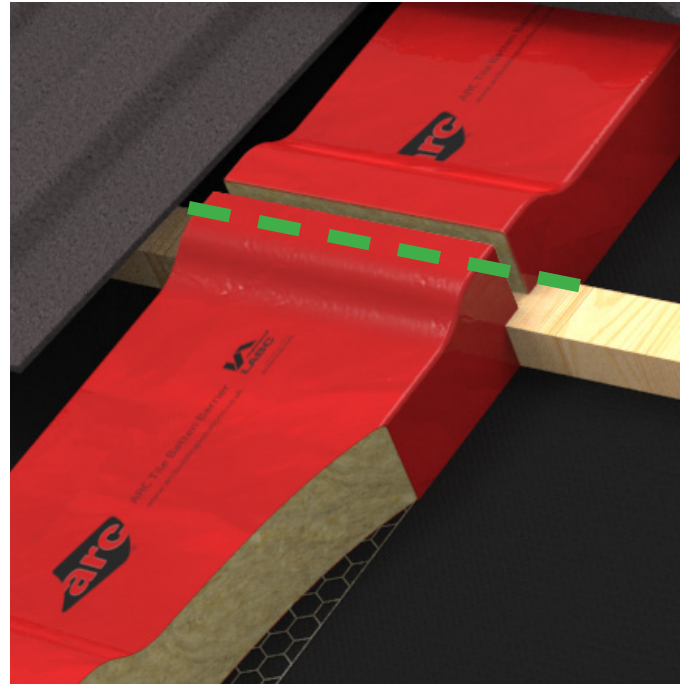

Key Stats

Length supplied	1250mm
Width	200mm
Thickness	50mm
Thermal conductivity	0.040W/mK

Standard Dimensions & Packaging Specification

Product Code	Dimensions	Lengths per pack	Packs per Pallet
WTBR1250/200/50	50 x 200 x 1250mm	5	30

WIRED TILE BATTEN BARRIER



Application

The ARC Wired Tile Batten Barrier is designed to provide a fire, thermal and acoustic break at the party wall between the roof tiles and roof membrane. It can be used in conjunction with the ARC Party Wall System to create a complete fire break at the separating wall between two dwellings.

Fire Properties

ARC Wired Tile Batten Barrier provides non-combustible fire stopping between the roof covering and underside of roof tiles. Correct installation will achieve compliance with NHBC Standards 7.2.16.

Standards

ARC Wired Tile Batten Barrier is manufactured using rockfibre mineral wool which achieves a fire classification of Euroclass A1 as defined in BS EN 13501-1, and conforms to BS EN 13162 and EN16001 Energy Management Systems.

Thermal Properties

ARC's wired rockfibre mineral wool insulation has a thermal conductivity of 0.040W/mK.

Storage and Packaging

ARC Wired Tile Batten Barrier are supplied baled to minimise waste packaging and offer easy handling on site. It is not recommended that the packs are stored in direct sunlight. When storing the barriers for longer periods of time it is recommended that the product should be stored indoors, or under cover.

Environment

No CFCs or HCFCs are involved in the manufacturing process of ARC's rockfibre mineral wool insulation. The material presents no known threat to the environment and is classed as ODP and GWP zero.

ARC Wired Tile Batten Barrier has a Green Guide rating of A+.

Health and Safety

ARC Wired Tile Batten Barrier is manufactured from a wire reinforced mineral wool insulation which can present sharp points when handling. Gloves should be worn and care taken when handling. ARC Building Solutions has an approved Health and Safety Policy and is committed to working and supplying products safely. ARC's rockfibre mineral wool is not classed as a possible human carcinogen. We have assessed products as required by Substances Hazardous to Health Regulations (COSHH). An ARC COSHH data sheet is available and can be downloaded from ARC's website.

Any information provided within this document is intended for guidance only. Expert technical advice should be sought before specification or installation of any product. It is of particular importance to ensure that any fire barrier or fire stopping product is tested for use with the exact application intended. ARC Building Solutions Ltd cannot accept liability for failure where usage is outside of the standard application, including but not limited to, where deflection or distortion has allowed gaps to form around the barrier, or where the barrier is not fitted in accordance with the manufacturer's guidelines.

© 2024 ARC Building Solutions Ltd. ARC and T-Barrier are registered trademarks of ARC Building Solutions Ltd.



Certificate Number 19310
ISO 9001, ISO 14001
ISO 45001