

TECHNICAL INFORMATION SHEET

Benefits

- Standard thickness 6mm, although other thicknesses are available upon request
- Offers long term performance without collapse or "bottoming" out under high point loads
- Resistant to ageing and deformation
- Quick and easy to install - simply bond to the subfloor beneath the partition
- Minimises construction heights
- High quality and exact material thickness guaranteed
- Available with various backings including self adhesive backing and Class 'O' foil facing
- Accreditation to ISO 9001, ISO 14001 and ISO 18001
- Product manufactured using Recycled Materials and 100% recyclable

Description

Regupol® Acoustic Isolating Strips are designed to sit beneath all types of partition walls and are a very simple and effective way to reduce structure borne noise. There are a number of different Regupol® materials that can be installed as Isolating Strips, each one tailored to withstand a specific weight per linear metre, therefore we have a Regupol® solution for all partition requirements.

Physical Information


Material thickness	6mm
Standard strip widths	43mm, 100mm, 120mm, 200mm Other widths are available

Installation Service

In addition to supply of this product CMS Danskin Acoustic Solutions can provide a listing of competitively-priced approved installers that service anywhere in the UK. Use of this service ensures that installation is performed to the highest standards by tradesmen fully experienced in the specialist skills of fitting CMS Danskin acoustic materials correctly. For further details contact our technical team on 01925 577711.


Installation Examples

Timber Stud Frame

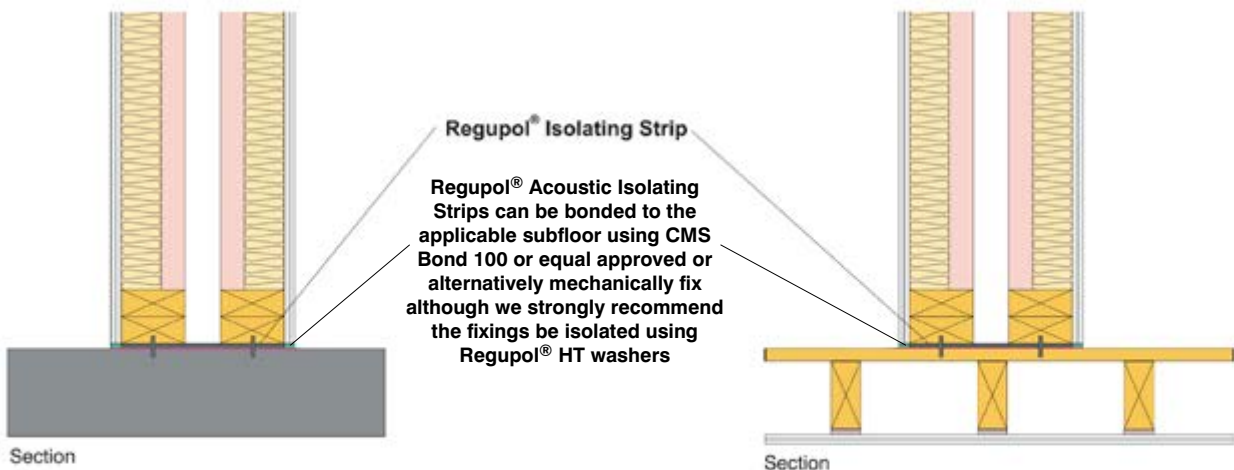

Continued overleaf

Metal Frame

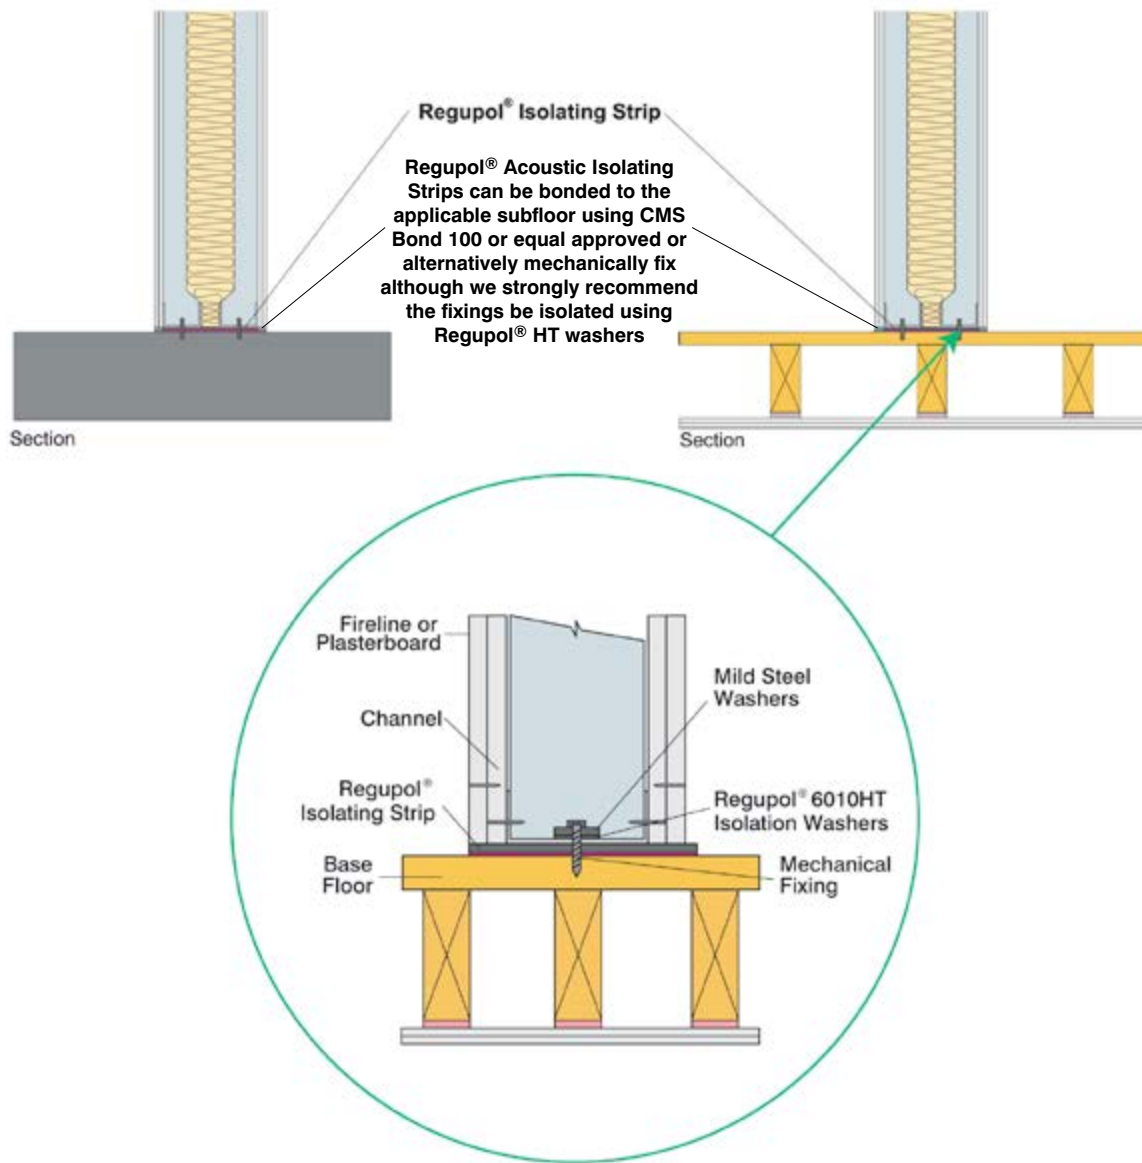

These diagrams are for illustrative purposes only and are intended to show the installation of a **Regupol® Isolating Strip**. For information relating to your specific applications, please contact CMS Danskin Acoustics.

N.B.

- The recognised technical rules of the industry, and the code of practice requirements of BS8203:2001 "Installation of Resilient Floor Coverings" are to be observed.
- Regupol® Acoustic Underlayments can be easily installed providing BS8203:2001 and our installation guidelines are observed.
- NBS specification available from www.cmsdanskin.co.uk



To access the CMS Danskin website for further product information please scan the QR code

Important Note:

- All partitions to be fixed in accordance with manufacturers guidelines. If mechanically fixing please ensure all fixings are isolated using **Regupol® 6010HT** washers and mild steel washers. Health and safety data sheets available on request.
- Health and safety datasheets are available on request.

IMPORTANT: Directions for use are given for guidance only and are not intended to form part of any contract. They should be varied or adapted to suit your particular materials or conditions of use. Goods supplied by the company are made to approved standards from the highest quality raw materials but no warranty or guarantee is given as to their suitability for any particular purpose or application, and no liability is accepted for any loss or damage arising directly or indirectly from the use of the Company's products irrespective of any information given to us as to intended use of such products. It is therefore recommended that prospective users should test a sample of this product under their own conditions to satisfy themselves that the product is suitable for the purpose intended.

Regupol® and Regufoam® are registered trade marks of BSW GmbH

Scotland Office:

1 Netherton Road, Wishaw ML2 0EQ

Central/Southern Office:

Unit 2 Lyncastle Road, Warrington, Cheshire WA4 4SN

email: info@cmsdanskin.co.uk website: www.cmsdanskin.co.uk

t: 01698 356000 f: 01698 372222

t: 01925 577711 f: 01925 577733