



Hush Slab Sound Absorber has been developed to reduce airborne sound transmission through internal and separating floors, ceilings and walls within new build, conversion and refurbishment projects.

The material is manufactured by a unique process, utilising renewable energy and a sustainable source of raw material. Hush Slab Sound Absorber provides an excellent acoustic performance, reducing airborne sound as part of a recommended sound insulating system. The product is rated A1 classification and therefore complies with the requirements of non-combustible materials/products, as defined in all UK and Ireland Building Regulations.

ACOUSTIC PERFORMANCE

All Hush acoustic systems have been tested with the Hush-Slab sound absorber. All acoustic figures displayed for the Hush-Systems are achieved because of how all the elements work together to achieve an overall acoustic rating. Therefore Hush-Slab is an integral element of all Hush-Systems and if it is removed will effect the acoustic results displayed. Therefore Hush-Slab must be used in all Hush-Systems to ensure compliance with the regulations



Thicknesses available mm	Thermal Conductivity W/mK	Thermal Resistance m ² K/W	Slab size mm	Slabs per pack	Area per pack m ²	Reaction to fire
100	0.035	2.85	1200 x 600	5	3.6	A1
75	0.035	2.10	1200 x 600	6	4.32	A1
50	0.035	1.40	1200 x 600	10	7.2	A1
25	0.035	0.70	1200 x 600	20	14.4	A1

PRODUCT DATA

- ✓ In between floor and ceiling joists and wall studs to suit system requirements
- ✓ Comprises of high density mineral fibre produced from inorganic rock.
- ✓ Durability will not encourage the growth of fungi, mould or bacteria, does not sustain vermin, is rot-proof, odourless and completely non-hygroscopic
- ✓ Reaction to fire - Classification A1 non-combustible

SUITABLE FOR



PRODUCT FEATURES

- A unique high density sound insulating slab available in varying thicknesses to suit many applications
- Excellent acoustic and thermal properties
- Non-combustible material - A1 classification
- Used extensively within refurbishment, conversion and new build projects to reduce airborne sound through system designed floor, ceiling and wall structures.
- Building Regulations Part E (England and Wales), Section 5 (Scotland) and Part G (Northern Ireland)
- Can be used as part of Robust Details floor and wall systems
- Simple to cut and install



BUILDING REGULATIONS

STATEMENT

- Approved Document E (England & Wales) incorporates a unit of measurement to determine low frequency airborne sound transmission. Due to proven intrinsic difficulties of measuring low frequency sound, in domestic sized rooms, it must be expected that there could be significant deviations in the accuracy of these measurements.
- There will be variations in measurements from site to site in all UK Building Regulations whether it be Document E (England & Wales), Section 5 (Scotland) or Part G (Northern Ireland). These variations are caused by structural differences in buildings, general site conditions and workmanship.
- All these factors can influence the repeatability of both impact and airborne acoustic test results. Therefore, any test results must be considered as an indication only and no warranty can be given or implied as to the actual acoustic performance in any particular situation.

OVERVIEW

The nuisance of noise is regarded as a health and safety issue for persons living in dwellings and all occupants of a dwelling should be allowed to follow normal domestic activities, including sleep and rest, without threat to their health from noise.

Noise is transmitted in buildings by both airborne and impact sound sources and UK Building Regulations requires that both these noise types are controlled. Practical guidance to meet with Building Regulation requirements is given within Approved Document E.

Sound insulation, in general terms, is the prevention of airborne and impact sound being transmitted from one part of a building to another through separating floors, ceilings or walls.

AIRBORNE SOUND

Airborne sound sources produce noise by vibrating the surrounding air, for example speech, televisions and home entertainment systems. Airborne sound insulation is concerned with reducing this sound transmission through separating floors and walls.

IMPACT SOUND

Impact sound sources produce noise by direct physical excitation of a part of a building, for example footsteps on a floor. Impact sound insulation is concerned with resisting this impact sound upon separating floors.

FLANKING TRANSMISSION

Flanking transmission occurs when sound is transmitted from one space to another indirectly, through adjoining parts of the structure, e.g. impact sound may be transmitted from one room to another through a timber floor, but also through the supporting wall.

Flanking transmission is always a potential problem within any structure, in particular, buildings being converted, and depending on the intensity of the acoustic energy received via flanking transmission paths, the effectiveness of sound insulation of separating partitions can be much lower than expected from their construction.

Careful consideration must be given to the effect of flanking transmission within any building and all potential flanking paths must be identified and eliminated prior to the installation of any sound insulation system.

APPROVED DOCUMENT E

UK Building Regulations approved Document E 2003 (with subsequent amendments in 2004, 2010, 2013, 2015) incorporates a unit of measurement to determine low frequency airborne sound transmission. Due to proven intrinsic difficulties of measuring low frequency sound, in domestic sized rooms, it must be expected that there could be significant deviations in the accuracy of these measurements. Furthermore, there will be variations from site to site due to structural differences in buildings, general site conditions and workmanship.

All these factors can influence the repeatability of both impact and airborne acoustic test results. Therefore, any test results must be considered as an indication only and no warranty can be given or implied as to the actual acoustic performance in any particular situation.

ENGLAND & WALES - NEW APPROVED DOCUMENT E

Building Regulations New Approved Document E came into force on 1st July 2003 (with subsequent amendments in 2004, 2010, 2013, 2015) with the introduction of pre-completion testing (PCT) for sound insulation as a means of demonstrating compliance, and as from 1st July 2004 the use of Robust Details (RD) in new build has been accepted as an alternative to PCT.

Requirements E1, E2 and E3 of Document E apply to the sound insulation of any type of conversion or new build used as a dwelling including; houses, apartments, hostel rooms, hotels, boarding houses, halls of residence and residential homes. Requirement E4 applies to acoustic conditions in schools.

Performance standards are given for each requirement, as follows:

TABLE 0.1A

Dwelling-houses and flats – performance standards for separating walls, separating floors, and stairs that have a separating function

	Airborne sound insulation $D_{nT,w} + C_{tr}$ dB (Minimum values)	Impact sound insulation $L'_{nT,w}$ dB (Maximum values)
Purpose built dwelling - houses and flats		
Walls	45	-
Floors & Stairs	45	62
Dwelling - houses and flats formed by material change of use		
Walls	43	-
Floors & Stairs	43	64



HUSH ACOUSTICS
Acoustic Material Manufacturers

**HEAD OFFICE
CONTACT**

Unit 2, Tinsley Industrial Estate, Shepcote Way, Sheffield, South Yorkshire, S9 1TH
T: 0114 700 5727 E: info@hushacoustics.co.uk www.hushacoustics.co.uk

BUILDING REGULATIONS cont.

TABLE 0.1B

Rooms for residential purposes – performance standards for separating walls, separating floors, and stairs that have a separating function.

	Airborne sound insulation $D_{nT,w} + C_{tr}$ dB (Minimum values)	Impact sound insulation $L'_{nT,w}$ dB (Maximum values)
Purpose built dwelling - houses and flats		
Walls	43	-
Floors & Stairs	45	62
Dwelling - houses and flats formed by material change of use		
Walls	43	-
Floors & Stairs	43	64

TABLE 0.2

Laboratory values for new internal walls and floors within dwelling-houses, flats and rooms for residential purposes, whether purpose built or formed by material change of use.

	Airborne sound insulation R_w dB (Minimum values)
Walls	40
Floors & Stairs	40

For further information on Approved Document E visit www.communities.gov.uk or www.planningportal.gov.uk

PCT & ROBUST DETAILS

Pre-completion testing applies to all multi-occupancy, multi-dwelling, or connected-residential material change of use developments. It also applies to all multi-occupancy, multi-dwelling, or connected-residential new build projects not built by means of Robust Details. At least 10 percent of each type of all new residential properties are tested to determine fulfillment of the regulations and pre-completion testing must always be carried out by an accredited acoustic engineer.

Contact with suitable sound testing companies can be arranged through our technical department.

ROBUST DETAILS

Robust Details are high performance separating wall and floor constructions that are expected to be sufficiently reliable not to need the check provided by PCT. A set of design details which achieve compliance with requirement E1 have been approved by Robust Details Ltd.

Builders intending to use any of these design details must register the project with Robust Details Ltd and follow, to the letter, procedures issued by Robust Details Ltd.

For further information on Robust Details visit www.robustdetails.com or contact the Hush Technical division on info@hushacoustics.co.uk.

SCOTLAND & NORTHERN IRELAND
SCOTTISH BUILDING REGULATIONS SECTION 5

Deals with the reduction of sound through separating building elements between domestic buildings.

	New build and conversions other than traditional buildings	Conversion of traditional buildings*
Minimum airborne sound transmission ($D_{nT,w}$) (Floors & walls)	56dB	53dB
Maximum impact sound transmission ($L'_{nT,w}$) (Floors only)	56dB	58dB


NORTHERN IRELAND BUILDING REGULATIONS
PART G

Northern Ireland Building Regulations Part G, Sound Insulation in Dwellings.

	Airborne sound insulation $D_{nT,w}$ dB (Minimum values)	Impact sound insulation $L'_{nT,w}$ dB (Maximum values)
New build		
Floors	52	61
Conversion		
Floors	48	64

For further information please visit www.buildingcontrol-ni.com

Should you require further information please visit www.hushacoustics.co.uk or email info@hushacoustics.co.uk

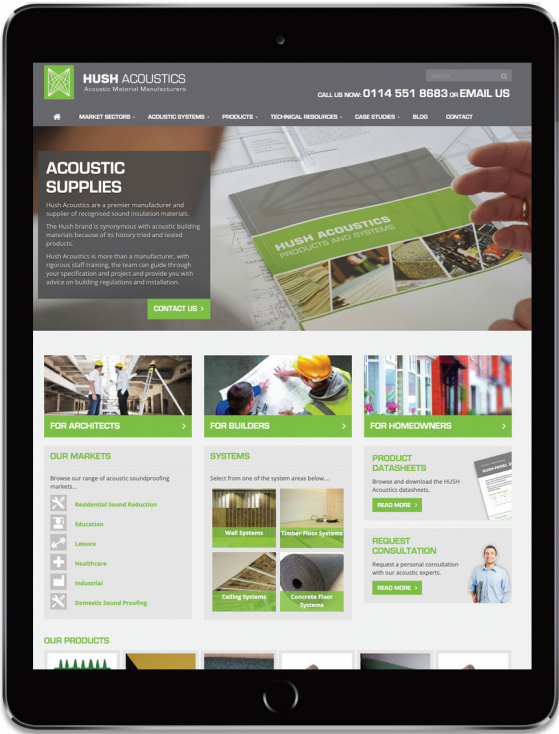

HUSH ACOUSTICS
Acoustic Material Manufacturers

**HEAD OFFICE
CONTACT**

Unit 2, Tinsley Industrial Estate, Shepcote Way, Sheffield, South Yorkshire, S9 1TH
T: 0114 700 5727 E: info@hushacoustics.co.uk www.hushacoustics.co.uk