


isocheck™

Isowave 23 System for walls

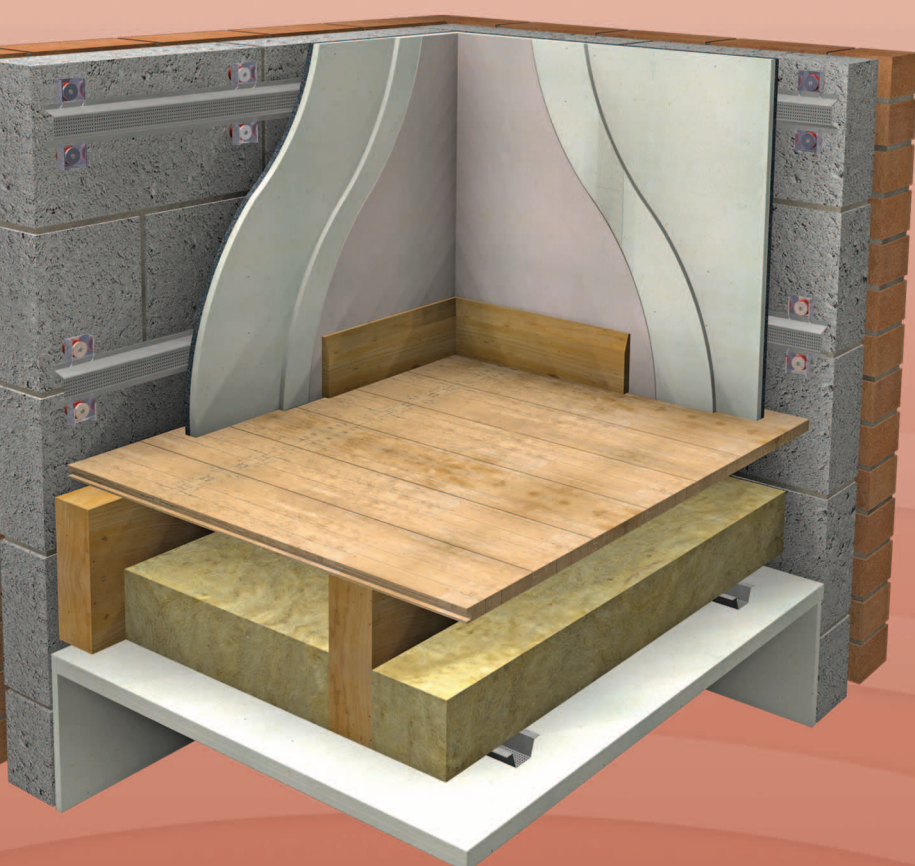

AIRBORNE AND FLANKING IMPROVEMENT SYSTEM

- Refurbishments
- Conversions




Taking the *mystery* out of Acoustics

DESCRIPTION

- ❑ The Isowave 23 system is for the treatment of excessive flanking sound that bypasses a separating floor via lightweight structural walls.
- ❑ Isowave 23 consists of a 10mm Isowave acoustic foam measured to BS 4443 and BS EN ISO 845:2009 bonded to 12.5mm high density, square edged fibre-reinforced gypsum board.
- ❑ Isowave 23 is ideal for upgrading a 4" masonry or timber partitions or external masonry wall which is causing flanking noise transmission (often revealed as the cause of a separating floor test failure) or used on independent studwork to upgrade an existing separating wall that is found to perform poorly for airborne sound transmission.
- ❑ When incorporated within a wall construction as detailed, Isowave 23 will individually achieve ½ hour fire protection.

APPLICATIONS

- ❑ To construct or upgrade separating and external walls for conversions and refurbishments.

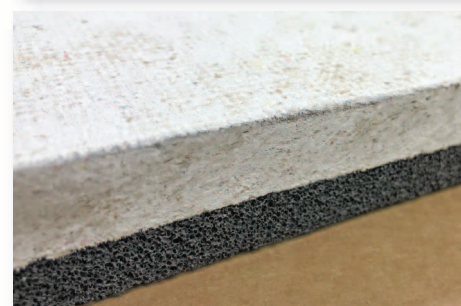

Product data

Overall board size:	1197 x 597 x 22.5mm
Resilient layer:	10mm
Board density:	1300 Kg/m ³
Foam density:	less than 90kg/m ³
Weight:	17.3kg/m ²
Sound Absorption:	α_w 0.26

Isocheck performs under the following classifications:

- ❑ Fire protection 30 minutes (for a single layer)
- ❑ BS476-7 Fire Propagation Index <12
- ❑ BS476-6 Surface Spread of Flame Class 1
- ❑ Building Regulations Paragraph A13 (b) Class O

Performance



Reduces unwanted flanking noise in order to comply with Approved Document E 2003 and subsequent amendments.

SPECIFICATION

The acoustic floor shall be:

- ❑ Isocheck Isowave 23, supplied by Isomass Ltd. Unit 14 Papworth Business Park, Stirling Way, Papworth Everard, Cambridgeshire CB23 3GY and installed in accordance with manufacturer's instructions / recommendations.


Detail 1

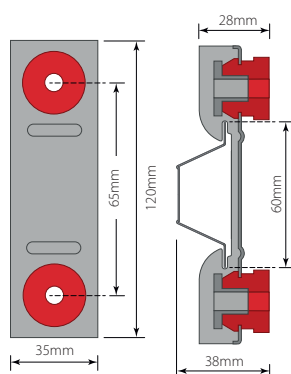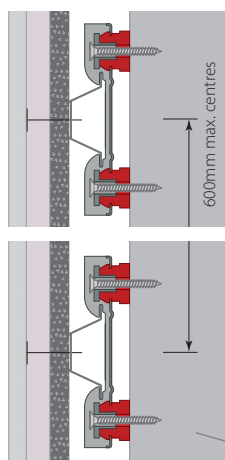

Isoblock & Isobar
(see separate data sheet)

Blockwork cavity or solid brickwork

Detail 2

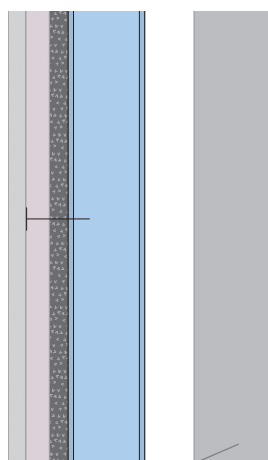

Detail 1

- ❑ 12.5mm tapered-edged plasterboard with all joints taped.
- ❑ Isowave 23.
- ❑ Isoblock & Isobar system bar fitted to brick / block wall construction at max. 600mm centres and 150mm from edges..

Detail 2

- ❑ 12.5mm tapered-edged plasterboard with all joints taped.
- ❑ Isowave 23 on timber or metal stud.
- ❑ Air space between stud and brick / block wall construction.

INSTALLATION

- ❑ Fix securely to all supports working from the centre of each board outward to the edges using the specified method of fixing at 250mm maximum centres with countersunk cross-slot screws 3.9 x 30mm positioned through the Isocheck Isoblock & Isobar system - fixed at 600mm max centres and 150mm max. from top and bottom edges (Detail 1) or into the metal 'I' beam (Detail 2). Position fixings not less than 20mm from board edges and 50mm from corners.
- ❑ The heads of all fixings should be sunk into the surface of the board and stopped with joint filler.
- ❑ The square edged cement particle board should be sealed with an intumescent sealant, joints to be a maximum 1mm wide. Any excess adhesive to be removed using a spatula once the adhesive has fully hardened.
- ❑ A 9.5mm or 12.5mm tapered edge plasterboard with all edges taped should then be fitted. Skim and lightly sand if required.
- ❑ Where electric socket boxes and light switches are installed the back of the box should be isolated with Isocheck Impacta Pads.

For advice on treatment of services and penetrations, consult our brochure or visit our website.

Please ask Isomass for guidance when considering the weight of any new blocks which will be incorporated in a wall directly surrounding a timber separating floor.

Every effort has been taken in the preparation of this sheet to ensure the accuracy of representations contained herein. Recommendations as to the use of materials, construction details and methods of installation are given in good faith and relate to typical situations. However, every site has different characteristics and reliance should not be placed upon the foregoing recommendations. Advice can be given as to specific applications of the products, upon request to isomass building products.