

Insulation

Great Britain & Ireland

Sixth Issue | 07/2025

# Kooltherm®

## K110 PLUS Soffit Board

Insulation for structural  
ceilings (soffits)



---

# Contents

---

<b>Introduction</b>	<b>1</b>
<b>Product details</b>	<b>2</b>
The inner facing	2
The core	2
The outer facing	2
Standards & approvals	2
Standard dimensions	2
Compressive strength	2
Durability	2
Resistance to solvents, fungi & rodents	2
Fire performance	3
Thermal properties	3
<b>Typical constructions &amp; U-values</b>	<b>4</b>
Assumptions	4
U-value table key	4
Fixed directly to concrete soffit	4
<b>Design considerations</b>	<b>5</b>
Heat loss & linear thermal bridging	5
Environmental impact & responsible sourcing	5
Sustainability & responsibility	5
Specification clause	6
Product classifications	6
Building Information Modelling (BIM)	6
Wind loading	6
Lightning protection	6
<b>Sitework</b>	<b>7</b>
Fixing directly to concrete soffits	7
Recommended fixing patterns	8
Taping	8
General	9
<b>About Kingspan Insulation</b>	<b>10</b>
Products & solutions	10
Company details	14
Services	14
Planet Passionate	15

# Introduction

- Premium performance rigid thermoset phenolic insulation - thermal conductivity of 0.019 W/mK
- Impact resistant building board
- Unaffected by air infiltration
- Resistant to the passage of water vapour
- Easy to handle and install compared to some other commonly available insulants
- Ideal for new build and refurbishment



Visit our free online U-value calculator.  
Offering free, quick and easy calculations  
for wall, floor and roof constructions.



## Useful links

### Website

[Kingspan Kooltherm® K110 PLUS webpage](#)

### Safety information

[Kingspan Kooltherm® product safety information](#)

---

# Product details

---

## The inner facing

The inner (concealed) facing of Kingspan Kooltherm® K110 PLUS is a glass tissue based facing, autohesively bonded to the insulation core during manufacture.

## The core

The core of the insulation board component of Kingspan Kooltherm® K110 PLUS is a premium performance rigid thermoset fibre-free phenolic insulant.

## The outer facing

The outer (exposed) facing of Kingspan Kooltherm® K110 PLUS is a 6 mm A1 Euroclass building board.

## Standards & approvals

Kingspan Kooltherm® K110 PLUS is manufactured under a management system certified to ISO 9001: 2015 (Quality management systems), ISO 14001: 2015 (Environmental management systems), ISO 37301: 2021 (Compliance management systems), ISO 45001: 2018 (Occupational health & safety management systems) and ISO 50001: 2018 (Energy management systems).

## Standard dimensions

Kingspan Kooltherm® K110 PLUS is available in the following standard size:

Nominal dimension		Availability
Length	(mm)	2400
Width	(mm)	1200
Building board thickness	(mm)	6
Insulant thickness	(mm)	Refer to local distributor or Kingspan Insulation price list for current stock and non-stock sizes.

## Compressive strength

The declared compressive strength of Kingspan Kooltherm® K110 PLUS is 100 kPa when tested to BS EN 826: 2013 (Thermal insulating products for building applications. Determination of compression behaviour).

## Durability

If correctly installed, Kingspan Kooltherm® K110 PLUS can have an indefinite life. Its durability depends on the supporting structure and the conditions of its use.

NB If the building is considered to be in an exposed location advice should be sought from the Kingspan Insulation Technical Service Department to determine the product's suitability.

## Resistance to solvents, fungi & rodents

The insulation core is resistant to short-term contact with petrol and with most dilute acids, alkalis and mineral oils. However, it is recommended that any spills be cleaned off fully before the boards are installed. Ensure that safe methods of cleaning are used, as recommended by suppliers of the spilt liquid. The insulation core is not resistant to some solvent-based adhesive systems, particularly those containing methyl ethyl ketone. Adhesives containing such solvents should not be used in association with this product. Damaged boards or boards that have been in contact with harsh solvents or acids should not be used.

The insulation core and facings used in the manufacture of Kingspan Kooltherm® K110 PLUS resist attack by mould and microbial growth, and do not provide any food value to vermin.

# Product details

## Fire performance

There are potential restrictions placed upon this product which vary dependant on building type, height, construction and location. For guidance regarding the routes to compliance for meeting the fire safety requirements of the Building Regulations / Standards, refer to [www.kingspaninsulation.co.uk/fireregulations](http://www.kingspaninsulation.co.uk/fireregulations) (for GB) or contact Technical Services at [technical@kingspaninsulation.ie](mailto:technical@kingspaninsulation.ie) (for Ireland).

Kingspan Kooltherm® K110 PLUS achieves European Classification (Euroclass) B-s1,d0, when the outer (exposed) 6mm Building board is exposed to the heat source, when classified to EN 13501-1:2018 (Fire classification of construction products and building elements - Classification using data from reaction to fire tests).

Please see the table below for further test information, conditions and field of application.

Test report number	EUI-21-SBI-000569 EUI-21-SFB-000569 EUI-21-SFB-000207 EUI-21-SBI-000207
Classification report number	EUI-21-000569
Product thickness (mm)	71 - 126
Substrate	Valid with any substrate, except plasterboards, of at least A2-s1,d0 class and at least 652.5 kg/m <sup>3</sup> density
Joints / edges	Valid for all Joint Arrangements

Details on the fire performance of Kingspan Insulation products may be obtained from the Kingspan Insulation Technical Service Department (see rear cover).

## Thermal properties

The  $\lambda$ -values and R-values detailed below are quoted in accordance with BS EN 13166: 2012 + A2: 2016 (Thermal insulation products for buildings. Factory made phenolic foam (PF) products. Specification) for the insulation board component and BS EN 13950: 2014 (Gypsum board thermal/acoustic insulation composite panels - definitions, requirements and test methods) for the building board component.

### Thermal conductivity

The thermal conductivity ( $\lambda$ -value) of the building board component of Kingspan Kooltherm® K110 PLUS is 0.27 W/mK.

The thermal conductivity of the insulation board component of Kingspan Kooltherm® K110 PLUS is 0.019 W/mK.

### Thermal resistance

Thermal resistance (R-value) varies with the thickness of each component and is calculated by dividing the thickness of the board (expressed in metres) by its thermal conductivity, followed by adding the resulting figures together. The sum is rounded down to the nearest 0.05 (m<sup>2</sup>K/W).

Product thickness* (mm)	Thermal resistance (m <sup>2</sup> K/W)
65	3.40
70	3.65
75	3.90
80	4.20
85	4.45
90	4.70
100	5.25
110	5.75
120	6.30

Building board component (mm)	Thermal resistance (m <sup>2</sup> K/W)
6	0.03

\* Product thickness = insulation thickness.

NB Kingspan Insulation's maximum available single insulation thickness is subject to alteration without notice. Please contact the Kingspan Insulation Technical Service Department for current stock and non-stock sizes (see rear cover for details).

# Typical constructions & U-values

## Assumptions

The U-values in Table 1 have been calculated using the method detailed in BS EN ISO 6946: 2017 (Building components and building elements. Thermal resistance and thermal transmittance. Calculation methods), and using the conventions set out in BR 443 (Conventions for U-value calculations). They are valid for the construction shown in Figure 1.

These examples are based on the use of Kingspan Kooltherm® K110 PLUS mechanically fixed directly to the soffit of a 200 mm concrete deck using metal fixings, with a cross sectional area of 25.97 mm, with a thermal conductivity of 50 W/mK and 3.82 fixings per m².

NB When calculating U-values to BS EN ISO 6946: 2017, the type of fixing used may change the thickness of insulation required. Please contact the Kingspan Insulation Technical Service Department (see rear cover for details) for a comprehensive U-value calculation, which will take account of the correction factor specific to the fixing.

NB For the purposes of these calculations the standard of workmanship has been assumed good, and therefore the correction factor for air gaps has been ignored.

NB The figures quoted are for guidance only. A detailed U-value calculation and a condensation risk analysis should be completed for each project.

NB If your construction is different from that specified, and / or to gain a comprehensive U-value calculation along with a condensation risk analysis of your project, please consult the Kingspan Insulation Technical Service Department for assistance (see rear cover).

## U-value table key

Further information on the applicable notional and area weighted average limiting U-values is available in the relevant geographical documentation:

- Approved Documents L to the Building Regulations for England
- Approved Documents L to the Building Regulations for Wales
- Technical Handbooks Section 6 to the Building Standards for Scotland
- Technical Guidance Document L (Dwellings) and Technical Guidance Document L (Buildings other than Dwellings) to the Building Regulations for the Republic of Ireland
- Technical Booklets F1 & F2 to the Building Regulations for Northern Ireland.

## Fixed directly to concrete soffit

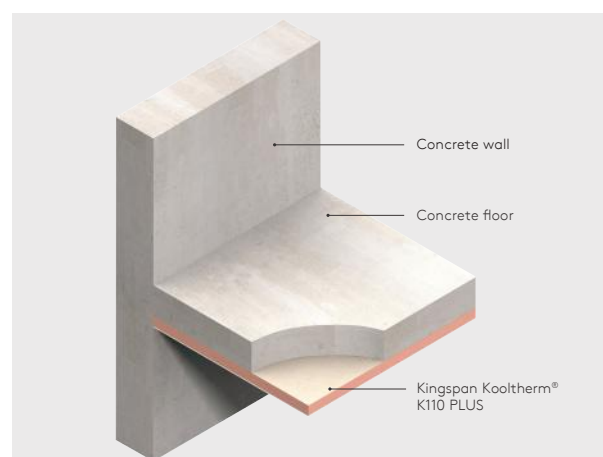


Figure 1

Product thickness* (mm)	U-values (W/m²K)
	Soffit insulation metal screw fixing
71	0.31
76	0.29
81	0.27
86	0.26
91	0.24
96	0.23
106	0.21
116	0.19
126	0.18
65** + 71	0.17
70** + 71	0.16
70** + 76	0.15

\* Product thickness = insulation thickness + 6 mm building board.

\*\* Packer board Kingspan Kooltherm® K110 Soffit Board.

NB Refer to local distributor or Kingspan Insulation price list for current stock and non-stock sizes.



# Design considerations

## Heat loss & linear thermal bridging

### Basic principles

Linear thermal bridging describes the additional heat losses or gains that occur at junctions between elements e.g. where a cavity wall meets the ground or intermediate floor, or at junctions around openings in the building fabric where the thermal insulation layer is discontinuous e.g. sills, jambs and lintels.

Interruptions within the insulation layer by materials with poorer insulating properties can result in a thermal bridge, which in turn can lead to problems of internal surface condensation and mould growth, especially if there is a drop in surface temperature.

The heat flow at these junctions and opening locations, over and above that through the adjoining plane elements, is the linear thermal transmittance of the thermal bridge. This is measured in W/mK, referred to as a 'psi-value' and expressed as a ' $\Psi$ -value'.

The lower the  $\Psi$ -value, the better the performance.  $\Psi$ -values are taken into account in the calculation methodologies e.g. the Standard Assessment Procedure (SAP) that are used to assess the operational CO<sub>2</sub> emissions and, where applicable, the fabric energy efficiency of buildings, primary energy or delivered energy rates.

$\Psi$ -values can comprise either, or a combination of, calculated and assumed values.

Approved details, such as the Acceptable Construction Details (Republic of Ireland), can uplift performance to provide a clear starting point towards achieving compliance, but can be limited in scope and applicability. The greatest opportunity for mitigating the impact of linear thermal bridges can come from following accurately 'modelled' details that take into account the following design considerations.

### Reducing linear thermal bridging

For soffit constructions, supporting beams and columns interrupting the insulation layer can represent significant thermal bridges, which can adversely affect the thermal performance of the floor if not suitably handled. Thermally, the best approach is to fully box around beams with appropriate insulation to limit these losses. For further advice on reducing linear and point thermal bridging, please contact Kingspan Insulation's Technical Service Department (see rear cover for details).



For further information on thermal bridging, click here to take a look at our website.

## Environmental impact & responsible sourcing

### Environmental Product Declaration

An Environmental Product Declaration (EPD), certified by BRE Global to the BRE Environmental Profiles 2013 Product Category Rules for Type III environmental product declaration of construction products to EN 15804: 2012 + A1: 2013 (Sustainability of construction works. Environmental product declarations. Core rules for the product category of construction products), has been created for the Kingspan Kooltherm® K110 PLUS baseboard produced at Kingspan Insulation's Pembridge, Herefordshire manufacturing facility.

### Responsible sourcing

Kingspan Kooltherm® K110 PLUS produced at Kingspan Insulation's Pembridge, Herefordshire manufacturing facility is certified to BES 6001 (Framework Standard for the Responsible Sourcing of Construction Products) 'Good'.



To download the EPD or certification please visit our **website**.

## Sustainability & responsibility

Kingspan Insulation has a long-term commitment to sustainability and responsibility: as a manufacturer and supplier of insulation products; as an employer; as a substantial landholder; and as a key member of its neighbouring communities.

A report covering the sustainability and responsibility of Kingspan Insulation Ltd's British operations at its Pembridge, Herefordshire and Selby, North Yorkshire manufacturing facilities is available upon request from [literature@kingspaninsulation.co.uk](mailto:literature@kingspaninsulation.co.uk).

---

# Design considerations

---

## Specification clause

Kingspan Kooltherm® K110 PLUS should be described in specifications as:

The soffit insulation shall be Kingspan Kooltherm® K110 PLUS Soffit Board \_\_\_\_ mm thick: comprising a premium performance fibre-free rigid thermoset phenolic insulation core with a glass tissue based facing on its inner face and a low emissivity composite foil on its outer face. The product shall have a thermal conductivity of 0.019 W/mK.

The product shall be manufactured under a management system certified to ISO 9001: 2015, ISO 14001: 2015, ISO 37301: 2021, ISO 45001: 2018 and ISO 50001: 2018; by Kingspan Insulation Limited; and installed in accordance with the instructions issued by them.

---

## Product classifications

Uniclass UK

Pr\_25\_71\_63\_59 Phenolic Foam Boards  
Pr\_80\_77\_76\_62 Phenolic Foam Insulation

CAWS

E60/30, E60/130, E60/140  
P10\_185

Details also available at **the NBS Source**.

---

## Building Information Modelling (BIM)

BIM objects for Kingspan Kooltherm® K110 PLUS can be downloaded using the Kingspan BIM Designer Software Tool available at [www.kingspaninsulation.co.uk/k110plus](http://www.kingspaninsulation.co.uk/k110plus).

## Wind loading

Where the insulation boards may be subject to external wind pressure, wind loadings should be assessed in accordance with BS EN 1991-1-4: 2005 + A1: 2010 (National Annex to Eurocode 1 Actions on Structures. General Actions. Wind Actions) / I.S. EN 1991-1-4: 2005 (Eurocode 1: Actions on structures - Part 1-4: General actions - Wind actions (Including Irish national annex)) taking into account:

- length / width / height of the building
- orientation of the building
- wind speed
- aspect (i.e. on a hill side)
- topographical value of the surrounding area.

---

## Lightning protection

Building designers should give consideration to the requirements of BS / I.S. 62305: 2011 - 2012 (Protection against lightning).



---

# Sitework

---

## Fixing directly to concrete soffits

- Insulation boards should be installed break-bonded, with joints lightly butted.
- The number of mechanical fixings required to fix Kingspan Kooltherm® K110 PLUS will vary with the geographical location of the building, the local topography, the height and width of the soffit concerned, and the soffit construction.
- A minimum of 11 mechanical fixings, with a minimum head diameter of 25 mm, are required to secure the insulation board to the soffit.
- Where the insulation boards may be subject to external wind pressure, the requirement for additional fixings should be assessed in accordance with BS EN 1991-1-4: 2005 + A1: 2010 / I.S. EN 1991-1-4: 2005.
- The fixings should be evenly distributed over the whole area of the board, and must offer a minimum 40 mm penetration into a solid substrate.
- Please refer to the column opposite for recommended fixing patterns.
- Fixings at board edges must be located > 50 mm and < 150 mm from edges and corners of the board and not overlap board joints.


- For details on fixings refer to:

<b>Ejot UK Limited</b> <a href="http://www.ejot.co.uk">www.ejot.co.uk</a>	+44 (0) 1977 687 040
<b>Fixfast</b> <a href="http://www.fixfast.com">www.fixfast.com</a>	+44 (0) 1732 882 387
<b>ITW Spit</b> <a href="http://www.itwcp.co.uk/Spit/">www.itwcp.co.uk/Spit/</a>	+44 (0) 800 731 4924
<b>MAK Fasteners</b> <a href="http://www.makfasteners.com">www.makfasteners.com</a>	+353 (0) 1 451 9004
<b>Masonry Fixings Services Ltd</b> <a href="http://www.masonryfixings.ie">www.masonryfixings.ie</a>	+353 (0) 1 642 6700
<b>SFS Intec</b> <a href="http://www.sfsintec.biz/uk">www.sfsintec.biz/uk</a>	+44 (0) 1132 085 500


# Sitework

## Recommended fixing patterns


- The images below show recommended fixing patterns, the number of fixings used and the resultant fixing density (number of fixings per m<sup>2</sup>).
- The fixing patterns shown are suitable for continuous flat (even) decks only. For non-continuous decks please contact the Kingspan Insulation Technical Service Department (see rear cover) for further guidance.

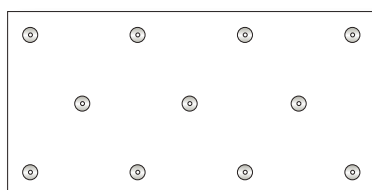


11 no. per board  
(2.4 x 1.2 m board - 3.81 fixings / m<sup>2</sup>)

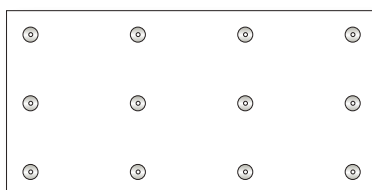


12 no. per board  
(2.4 x 1.2 m board - 4.16 fixings / m<sup>2</sup>)

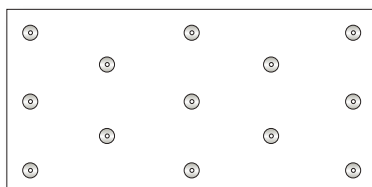

13 no. per board  
(2.4 x 1.2 m board - 4.51 fixings / m<sup>2</sup>)

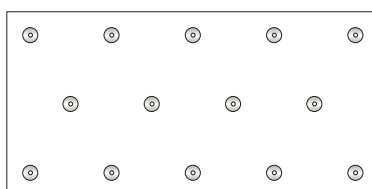

14 no. per board  
(2.4 x 1.2 m board - 4.86 fixings / m<sup>2</sup>)

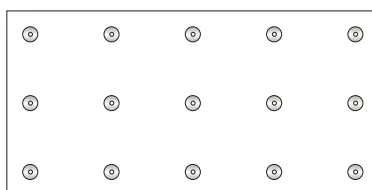

15 no. per board  
(2.4 x 1.2 m board - 5.20 fixings / m<sup>2</sup>)

## Taping

- In the absence of other protection, exposed insulation edges of Kingspan Kooltherm® K110 PLUS should be protected by a suitable self-adhesive aluminium foil tape, with a 50 mm min. wide overlap onto the insulation board face (Figure 2).
- For advice on the specification of self-adhesive aluminium foil tape and application guidelines, please refer to:

**Bostik Limited**  
[www.bostik.co.uk](http://www.bostik.co.uk)

+44 (0) 1785 272 727

**ProTech Global Ltd**  
[www.protechglobal.co.uk](http://www.protechglobal.co.uk)

+44 (0) 117 298 0573

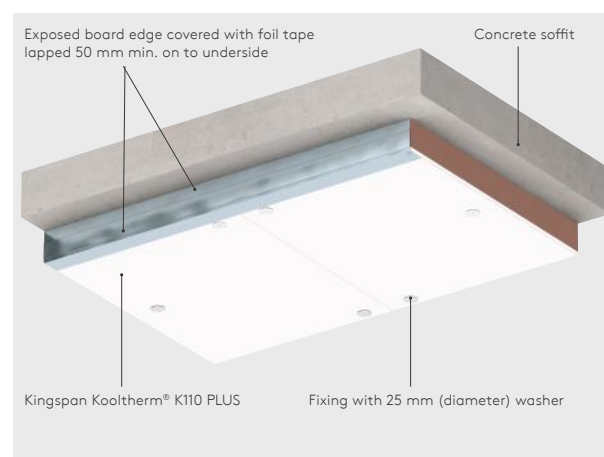


Figure 2: Protection of exposed insulation edges of Kingspan Kooltherm® K110 PLUS

---

# Sitework

---

## General

### Cutting

- Cutting should be carried out either by using a fine toothed saw or scoring with a sharp knife, snapping the board over a straight edge and then cutting the facing on the other side.
- Ensure accurate trimming to achieve close-butting joints and continuity of insulation.

### Availability

- Kingspan Kooltherm® K110 PLUS is available through specialist insulation distributors and selected builders' merchants throughout the UK and Ireland.

### Packaging & storage

- The polyethylene packaging of Kingspan Insulation products, which is recyclable, should not be considered adequate for outdoor protection.
- Ideally, boards should be stored inside a building. If, however, outside storage cannot be avoided, then the boards should be stacked clear of the ground and covered with an opaque polythene sheet or weatherproof tarpaulin. Boards that have been allowed to get wet should not be used.

## Health & safety

- Kingspan Insulation products are chemically inert.
- A Safety Information Data Sheet for this product is available from the Kingspan Insulation website [www.kingspaninsulation.co.uk/safety](http://www.kingspaninsulation.co.uk/safety) or [www.kingspaninsulation.ie/safety](http://www.kingspaninsulation.ie/safety).

Please note that the reflective surfaces on this product are designed to enhance its thermal performance. As such, they will reflect light as well as heat, including ultraviolet light. Therefore, if this product is being installed during very bright or sunny weather, it is advisable to wear UV protective sunglasses or goggles, and if the skin is exposed for a significant period of time, to protect the bare skin with a UV block sun cream.

The reflective facings used on this product can be slippery when wet. Therefore, it is recommended that any excess material should be contained to avoid a slip hazard.

Warning - do not stand on or otherwise support your weight on this product unless it is fully supported by a load bearing surface.

# About Kingspan Insulation

## Products & solutions

Rigid insulation products for building fabric applications, including roofs, walls and floors.

- Kingspan AlphaCore® – microporous silica-based insulation.
- Kingspan OPTIM-R® – vacuum insulation panel (VIP) systems.
- Kingspan Kooltherm® – phenolic insulation.
- Kingspan Therma™ – PIR insulation.
- K-Roc® – rock mineral fibre insulation.
- Kingspan GreenGuard® – extruded polystyrene insulation (XPS).
- Kingspan TEK® – structural insulated panels (SIPs).
- Cavity closers – PVC-U extrusions with an insulation core.
- Membranes – for pitched roofs and walls.




---

# About Kingspan Insulation

---

Solutions available for roofs, walls and floors of commercial buildings, from schools to retail.

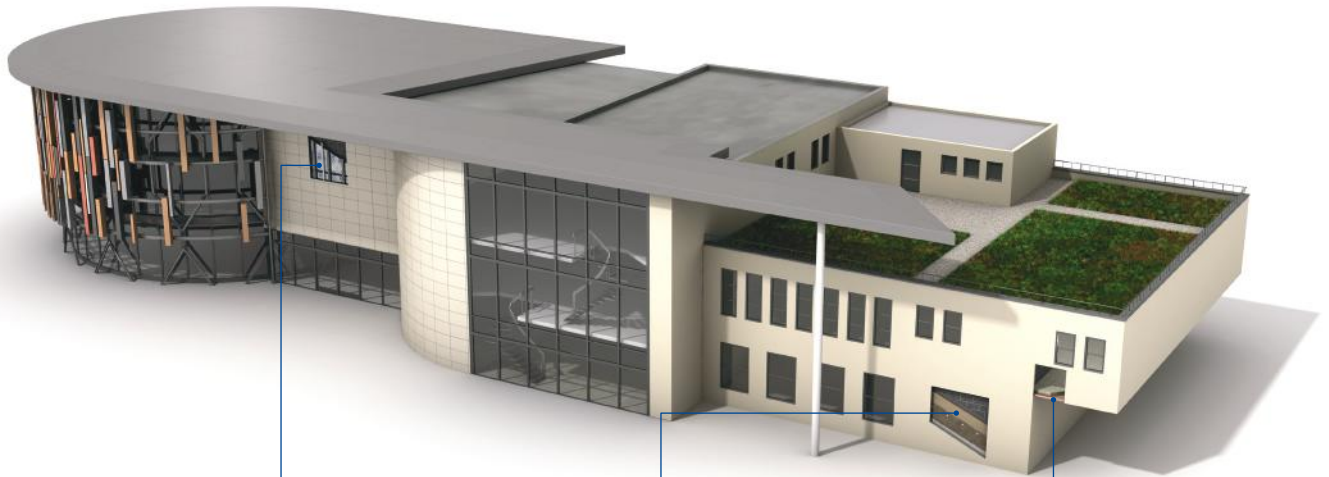

Insulation for use behind rainscreen or masonry façade systems



External insulation for masonry walls




Insulation for structural ceilings (soffits)

---


# About Kingspan Insulation

---


From new housing developments to refurbishing your home, we offer a number of different solutions for roof, wall and floor applications.



Insulation for tiled or slated pitched warm roof spaces




Insulated extrusions for closing wall cavities at openings



Full and partial fill cavity wall insulation








Insulation for tiled or slated pitched warm roof spaces



Insulation for flat roofs and terraces



Insulation for floors



Insulation for timber and steel framing systems

# About Kingspan Insulation

## Company details

Kingspan Insulation Ltd is part of the Kingspan Group plc., one of Europe's leading construction product manufacturers. The Kingspan Group was formed in the late 1960s and is a publicly quoted group of companies headquartered in Kingscourt, County Cavan, Ireland.



Kingspan Insulation Ltd is a leading manufacturer of rigid insulation products and insulated systems for building fabric and building services applications.


Our GB head office is located in Pembridge, in the heart of rural Herefordshire. Our northern hub is near Selby in North Yorkshire. We also have a site in Castleblayney, Ireland. All three sites are accredited to the independent compliance standard ISO 37301: 2021.



## Services

Our support services provide fast and accurate advice no matter what your role is. Visit our website to access the following services.

- U-value calculations – free, quick and easy U-value calculations with our U-value Calculator.
- Help and advice on your projects, including stockists, how to guides, regulatory guidance and e-learning.
- Dedicated Specification and Sales teams to support projects.
- Building Information Modelling (BIM) – download BIM objects for our products.
- Tapered roofing service – Kingspan Insulation's tapered roofing systems come with a supporting design service to ensure the most cost-effective solution for a roof is identified.

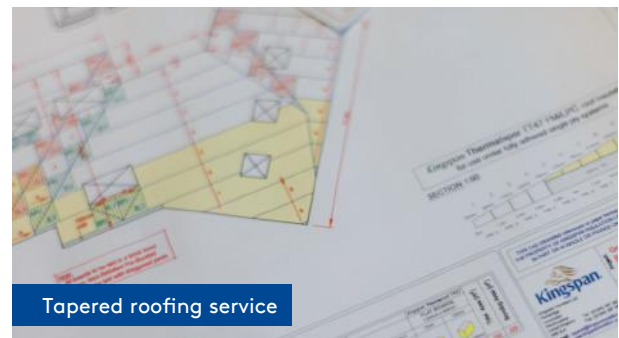

- CPDs – Kingspan Insulation offers a number of free CPD seminars for architects and specifiers covering a wide range of industry topics. CPDs can be booked or a range of courses can be found online.
- Product awareness training – build your team's knowledge with on-site training and support with one of our experienced product technicians who cover the full range of Kingspan products and applications, from flooring to roofing and everything in-between with both internal and external wall insulations.







# PLANET PASSIONATE

Planet Passionate is our group wide environmental global sustainability programme.

Our Planet Passionate programme aims to have a positive impact on three big global challenges: climate change, circularity and protection of our natural world.



Scan for our latest progress report to learn more about our targets, partnerships and global commitments.

# Contact details

## Great Britain

Pembridge | Leominster  
Herefordshire | HR6 9LA

T: +44 (0) 1544 388 601

E: [info@kingspaninsulation.co.uk](mailto:info@kingspaninsulation.co.uk)

[www.kingspaninsulation.co.uk](http://www.kingspaninsulation.co.uk)

For individual department contact details please visit

[www.kingspaninsulation.co.uk/contact](http://www.kingspaninsulation.co.uk/contact)



Visit our free online U-value calculator.  
Offering free, quick and easy calculations  
for wall, floor and roof constructions.

## Ireland

Kingspan Insulation Ltd  
Castleblayney | County Monaghan

T: +353 (0) 42 979 5000

E: [info@kingspaninsulation.ie](mailto:info@kingspaninsulation.ie)

[www.kingspaninsulation.ie](http://www.kingspaninsulation.ie)

For individual department contact details please visit

[www.kingspaninsulation.ie/contact](http://www.kingspaninsulation.ie/contact)



Visit our free online U-value calculator.  
Offering free, quick and easy calculations  
for wall, floor and roof constructions.



For the most up-to-date  
version of this brochure  
please scan or click [here](#).

To access pre-existing product information or information relating to previously sold/discontinued products please email [literature@kingspaninsulation.co.uk](mailto:literature@kingspaninsulation.co.uk).

The information contained in this brochure is believed to be correct at the date of publication. Kingspan Insulation Limited ("Kingspan Insulation") reserves the right to alter or amend the product specifications without notice due to continuous improvement commitments. There may also be relevant changes between publications with regard to legislation, or other developments affecting the accuracy of the information contained in this brochure. Product thicknesses shown in this document should not be taken as being available ex-stock and reference should be made to the current Kingspan Insulation price-list or advice sought from Kingspan Insulation's Customer Service Department. The information, technical details and fixing instructions etc. included in this literature are given in good faith and apply to uses described. Kingspan Insulation does not accept responsibility for issues arising from using products in applications different from those described within this brochure or failure to correctly follow the information or instructions as described within this brochure. Recommendations for use should be verified with a suitable expert or professional for suitability and compliance with actual requirements, specifications and any applicable laws and regulations. For other applications or conditions of use, Kingspan Insulation offers a technical advisory service (see above for contact details), the advice of which should be sought for uses of Kingspan Insulation products that are not specifically described herein. Please check that your copy of this literature is current by contacting the Kingspan Insulation Marketing Department.

© Kingspan, AlphaCore, Kingspan GreenGuard, Kooltherm, K-Roc, OPTIM-R, TEK and the Lion Device are Registered Trademarks of the Kingspan Group plc in the UK, Ireland and other countries. All rights reserved.

TM Therma is a Trademark of the Kingspan Group plc.

Kingspan Insulation Ltd is not associated with, and its products have not necessarily been tested by, the GREENGUARD Environmental Institute.

Registered in England & Wales, No. 01882722. Registered Office: Pembridge, Leominster, Herefordshire HR6 9LA UK. VAT GB428602456.

Registered in Ireland, No. 54621. Registered Office: Bree Industrial Estate, Castleblayney, Co. Monaghan, Ireland. VAT IE4575069I.

