

Polypipe TDI Range


Product Information Sheet

Stonecor - Insulated DPC

Code: **GSC165 / GSC225**

Description

An insulated DPC to provide a simple solution to thermal bridging where the cavity is closed when using a returned block work detail.

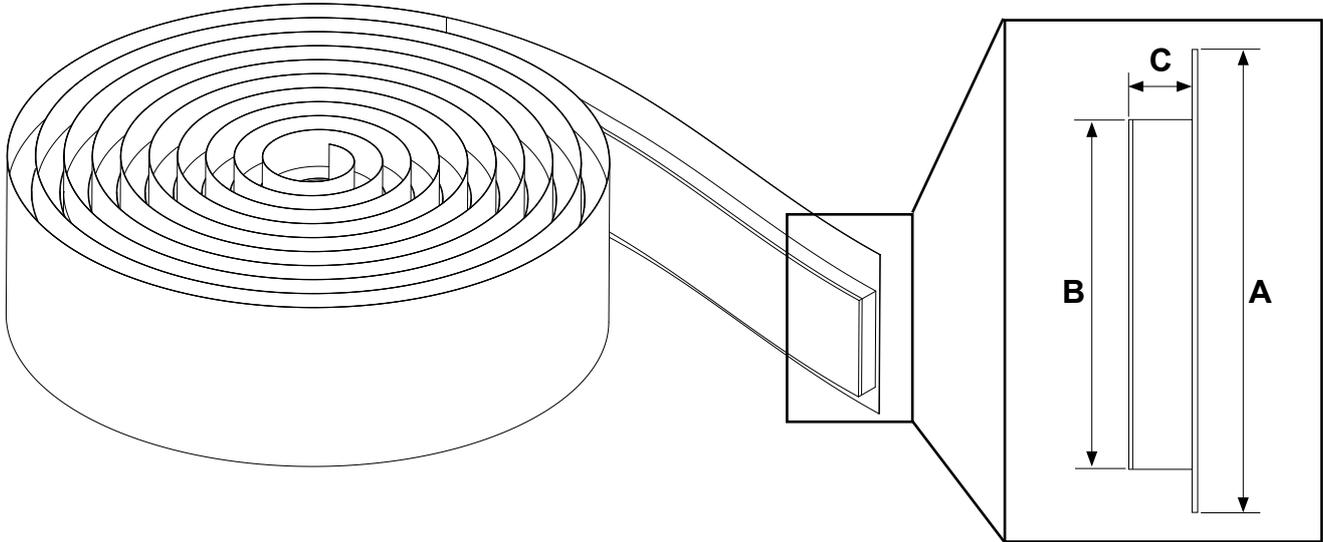

Cavity Closer	Length Per Roll	DPC Width (A)	Insulation Width (B)	Insulation Depth (C)	Quantity per bag
GSC165	10m	165mm	100mm	25mm	5
GSC225	10m	225mm	150mm	25mm	5

Additional Details

- The product should be stored inside a building. If outdoor storage is not avoidable, the product should be stacked clear of the ground and protected with a weatherproof covering.
- If the insulation core has been allowed to get wet, do not proceed to use the product.

Specification		
	DPC	Insulation
Material	Polyethylene	Aluminium foil faced, non-combustible mineral wool
Colour	Black	Neutral
K-Value	0.034 W/mk	

References	
WFRC	Report No: 112891
BBA	Certificate No: 19/5699

MANTHORPE BUILDING PRODUCTS LTD
MANTHORPE HOUSE
BRITAIN DRIVE
CODNOR GATE BUSINESS PARK
RIPLEY
DERBYSHIRE DE5 3ND

TEL: 01773 303 000
FAX: 01773 303 300
EMAIL:
mbp.care@manthorpebp.co.uk
WEB:
www.manthorpebp.co.uk

DRAWN	ISSUE DRAWN
K.B. 29/10/19	B.H. 21/02/24
The company maintains a policy of continuous development of its product range and reserves the right to amend the specification without notice.	

DRG No

MBP 8340

Issue

03