


NOVIA

Novia Butyl **Tape**

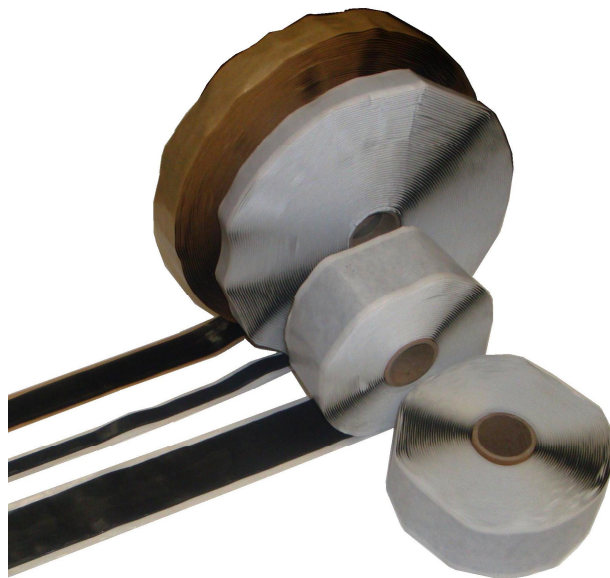

General

Novia Double-Sided Butyl Tape is a high performance Polyisobutylene (PIB) based sealing tape. The product is used in a wide range of applications where products or installations need to be sealed against air and water ingress. Novia Butyl Tape is cost effective, non toxic and requires no tools to apply. All rolls are accurate to use with little waste and no mess.

This type of tape is primarily used within the construction membrane market for the lap sealing of VCL or DPM membranes. All surfaces should be dry, clean and free from debris, frost and grease.

Product Data

Shelf Life	24 Months in ambient conditions
Life Expectancy	In excess of 20 years
U.V. Resistance	Excellent
Service Temperature Range	-40 °C to +90 °C
Specific Gravity	1.6g/cm ³ to DIN EN ISO 10563
Moisture Vapour Transmission Rate	0.16 g/m ² /24hr/mm to ISO9932 / BS ISO 15106
Compatibility	Very good adhesion to most surfaces & compatible with most commonly used construction materials for further information contact our technical department.

Unless otherwise stated this data is to be regarded as TYPICAL data.

NOVIA LTD, Unit 12 Heronden Road, Parkwood Industrial Estate, Maidstone, Kent. ME15 9YR

Tel (01622) 678952 Fax (01622) 679025 e-mail: sales@novia.co.uk

Registered Office: Star House, Star Hill, Rochester, ME1 1UX

Company reg no. 3229379 VAT reg no. GB 662 277131

DS1012_ButylTap