

ROCKFLOOR®

Thermal and acoustic stone wool insulation for ground and separating floors



ROCKFLOOR®

The ROCKFLOOR® range consists of two products families, Thermal ROCKFLOOR® and Acoustic ROCKFLOOR®.

Made from renewable stone wool, the ROCKFLOOR® range offers dual density thermal insulation for ground floors. In addition it can be used as a high performing acoustic solution for separating floors, providing optimum comfort to occupants.



Certificate No FM 02262

nssPlus



Advantages

- High compressive and point load resistance
- Minimises thermal and acoustic bridging
- Easy handling and fitting
- Absorbs sub-floor imperfections
- Can be placed over or under the over site slab

Description

The ROCKFLOOR® range comprises of two product families; Thermal ROCKFLOOR® and Acoustic ROCKFLOOR®.

Thermal ROCKFLOOR® is a dual density insulation providing thermal performance for ground floors.

Acoustic ROCKFLOOR® delivers impact sound protection for intermediate and separating floors.

Applications

ROCKWOOL ROCKFLOOR® is designed for use in thermal applications, to meet Building Regulations Part L, in ground floors, and for acoustic applications, to meet Building Regulations Part E, in intermediate and separating floors.

This document details the different constructions options available.

Performance

Thermal

Tested to BS EN 13162, ROCKWOOL Thermal ROCKFLOOR® has a thermal conductivity of 0.038 W/mK.

Fire classification

Rated A1 when tested to EN 13501-1 classification using test data from reaction to fire test. ROCKFLOOR® boards can be used in conjunction with ROCKWOOL Flexi to construct a compartment floor, providing 1 hour of fire resistance combined with acoustic isolation.


Acoustics

The density and fibre orientation of ROCKFLOOR means it is especially effective at absorbing vibration, or impact, based sound. Suitable for use in achieving Part E (Sound) of the Building Regulations in separating floors.

Technical information

Standards and approvals

ROCKWOOL ROCKFLOOR® complies with the requirements of BS EN 13162 Thermal Insulation Products for Buildings: Factory made mineral wool (MW) products specification.

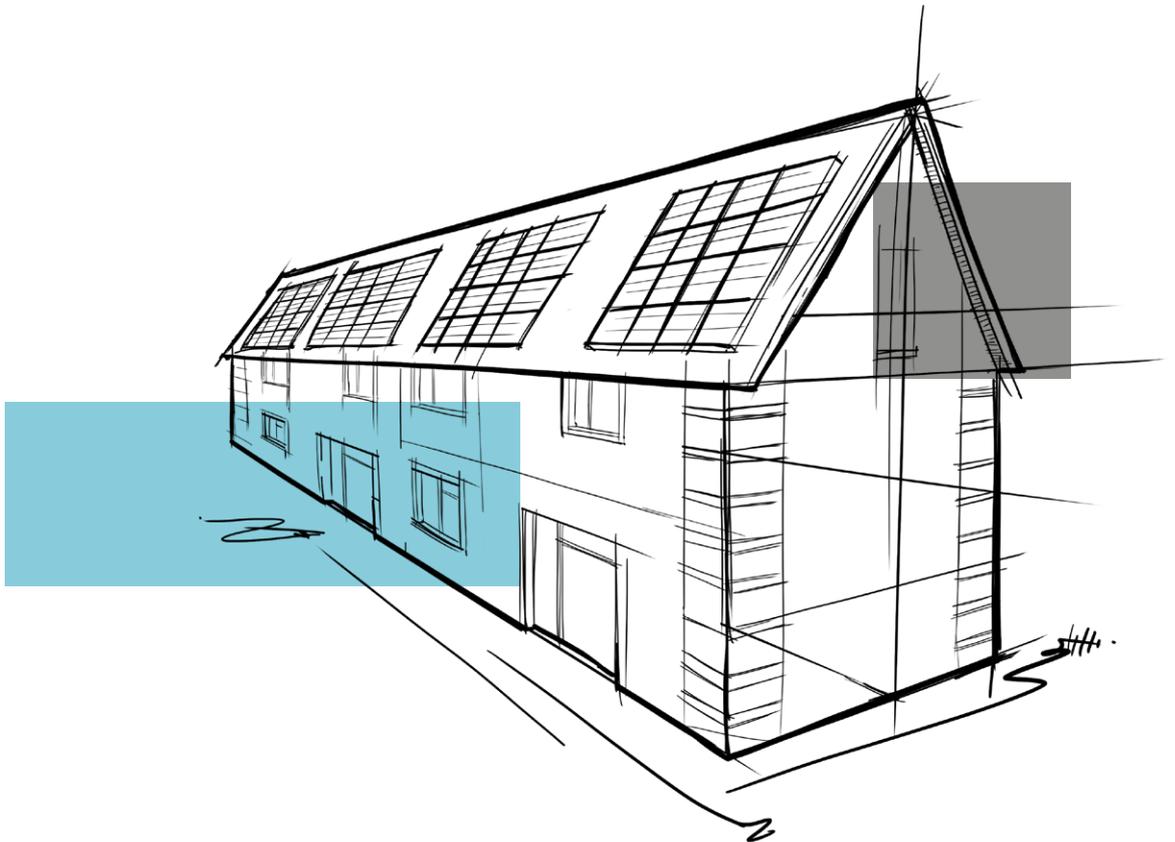

Installation


Thermal ROCKFLOOR®

Because the U-value for ground floors is dependent upon size, shape, soil type, edge, insulation etc, it is not possible to quote specific values. The following tables show the insulation thickness required to suit floor types based on their P/A ratio.

Construction 1: Ground bearing slab

Thermal ROCKFLOOR® can be installed below the concrete slab or below screed.


P/A ratio	U-value (W/m ² K)			
	0.25 Thickness (mm)	0.22 Thickness (mm)	0.20 Thickness (mm)	0.18 Thickness (mm)
0.1	nil	nil	nil	nil
0.2	30	50	65	90
0.3	60	80	95	120
0.4	75	95	110	130
0.5	85	105	120	140
0.6	90	110	130	150
0.7	95	115	130	150
0.8	105	120	140	160
0.9	105	125	140	160
1.0	110	130	145	175

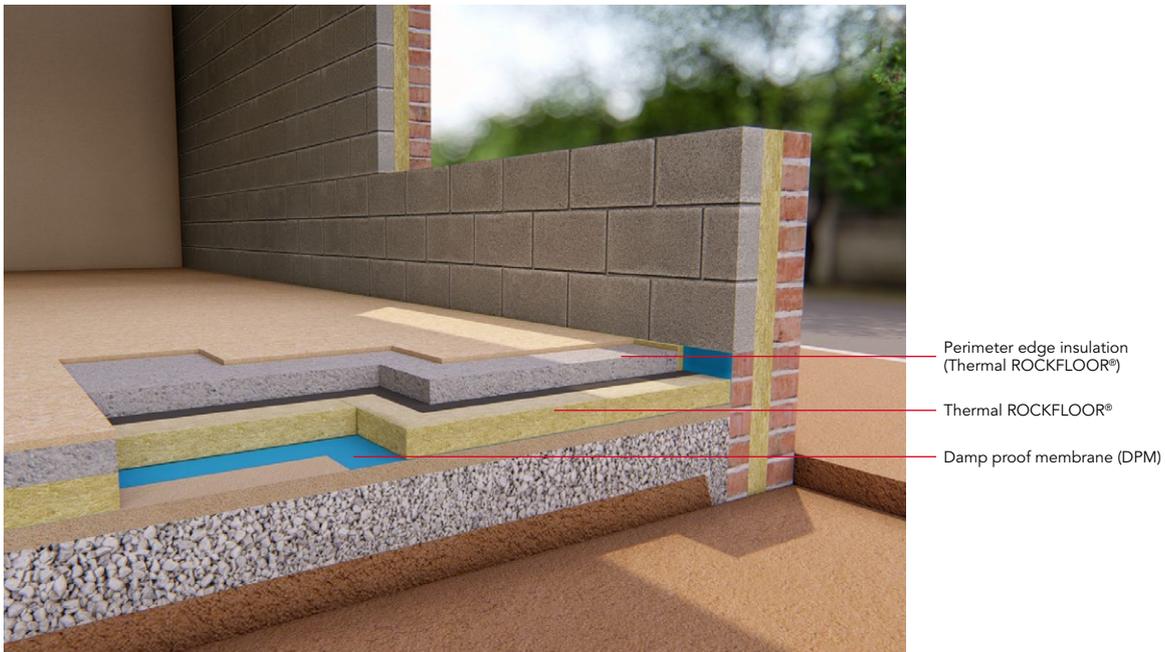

Construction 2: Suspended beam and block

ROCKWOOL Thermal ROCKFLOOR® is laid over the dense beam and block floor below screed or t&g flooring grade chipboard where floor heights are limited.

P/A ratio	U-value (W/m²K)			
	0.25 Thickness (mm)	0.22 Thickness (mm)	0.20 Thickness (mm)	0.18 Thickness (mm)
0.1	nil	30	50	70
0.2	65	80	100	120
0.3	80	100	120	140
0.4	95	115	130	150
0.5	100	120	135	160
0.6	105	125	140	160
0.7	105	130	145	165
0.8	110	130	145	165
0.9	115	130	150	170
1.0	115	135	150	170

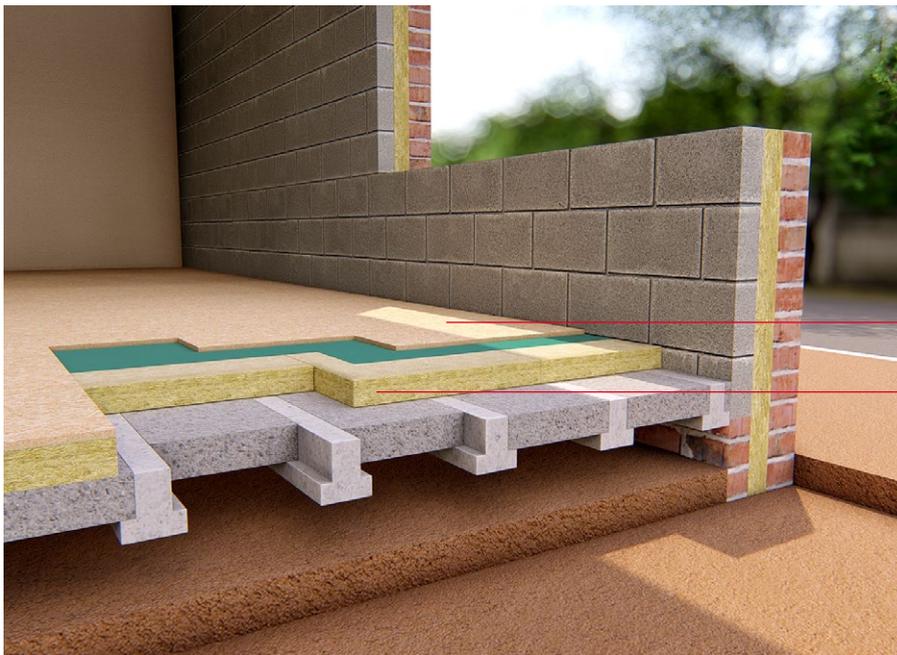

T&G chipboard finish (or screed)

Thermal ROCKFLOOR® laid over 500 gauge polythene vapour barrier – when chipboard finish is used

Acoustic ROCKFLOOR®

Separating floors

The Approved Document E describes a range of constructions that should achieve the standards if built correctly.

Service runs


Service runs can be accommodated by recessing the ROCKFLOOR® and a minimum thickness of 50mm of the insulation is required to achieve this

Separating Timber Floor Upgrade (Material Change of Use): ADE Section 4

Airbourne DnT,w + Ctr 43dB (or more)

Impact L'nT,w 64dB (or less)

- Floating layer: A minimum of 2 layers of board material are required to provide a minimum total mass of 25Kg/m², spot bonded together with joints staggered (eg 18mm t&g flooring grade chipboard and 19mm plasterboard plank).
- The floating layer should be loose laid over the ROCKFLOOR®.
- A minimum of 25mm of ROCKWOOL ROCKFLOOR® resilient layer should be laid on the existing floor deck on existing timber floor joists.
- 100mm of ROCKWOOL Flexi should be used between joists.
- Existing ceiling upgraded to 20Kg/m²: If the existing ceiling consists of lath and plaster it should be retained, providing it satisfies Part B (Fire Safety). If in doubt, underdraw it with an additional layer of 12.5mm Firecheck board before screwing into the joists.
- Pre-completion site testing required

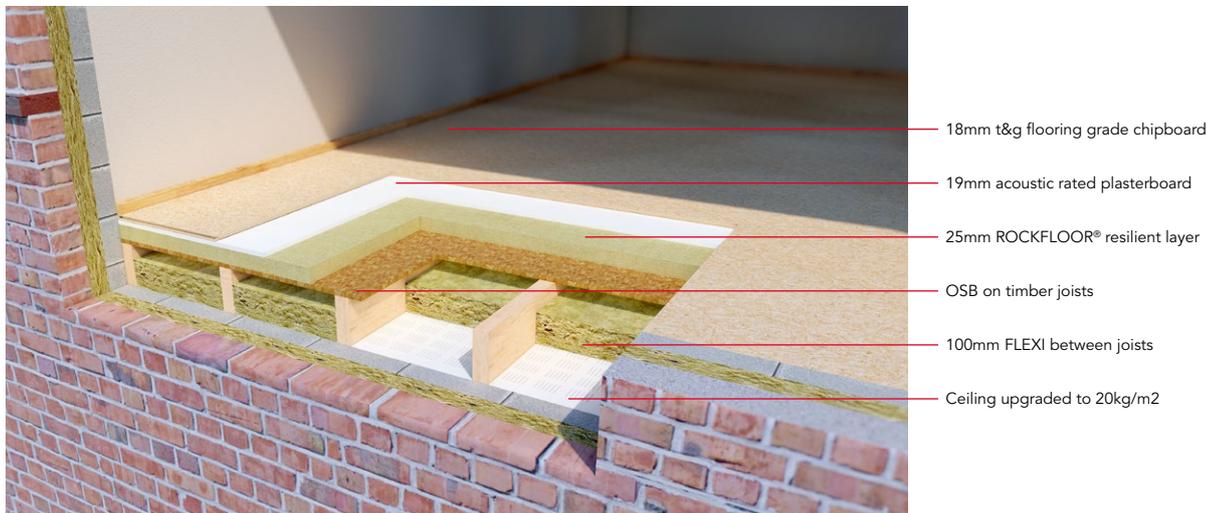

Note: If the existing ceiling is being replaced the sound performance of the floor can be further enhanced by fitting resilient bars which isolate the ceiling from the floor structure.

By adopting this method, Site Test Report no. 2271 showed that the construction exceeded ADE performance requirements:

Airborne: Rw 48 dB DnTw + Ctr

Impact: 58 dB LnTw


Robust details – Acoustic solutions

The Approved Document E includes references to Robust Details (RDs) for use in new build separating wall and floor applications in dwellings. Compliance with the RDs will negate the requirement for pre-completion testing of new build separating wall and floor constructions.

Robust Details are based upon meeting sound test-values in excess of those required by Approved Document E.

This guide highlights RDs involving ROCKWOOL ROCKFLOOR® products:


Separating floors – concrete

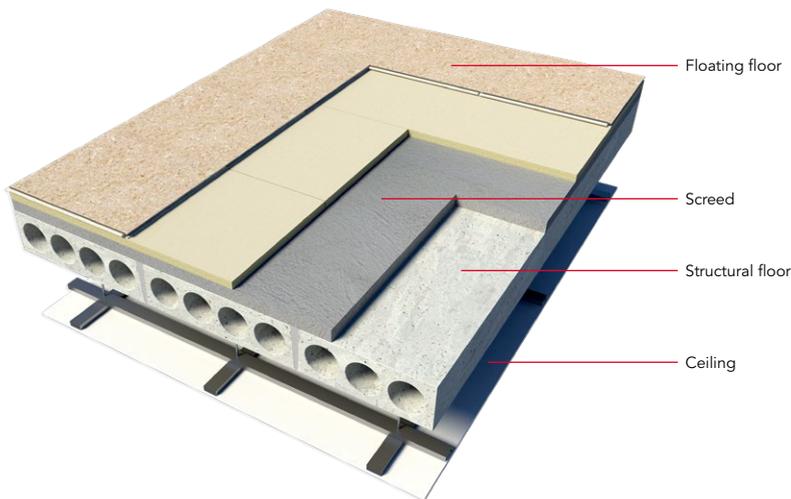

1. Precast concrete plank - E-FC-1

Robust Details platform floor finish FFT4:

- T&g flooring board on 25mm ROCKWOOL ROCKFLOOR® (shown)
- Screed: 40mm (min) screed nominal 80Kg/m² mass
- Structural floor: 150mm (min) pre-cast concrete floor plank, minimum 300Kg/m² mass per unit area
- Ceiling finish: See Robust Detail handbook for suitable ceiling options

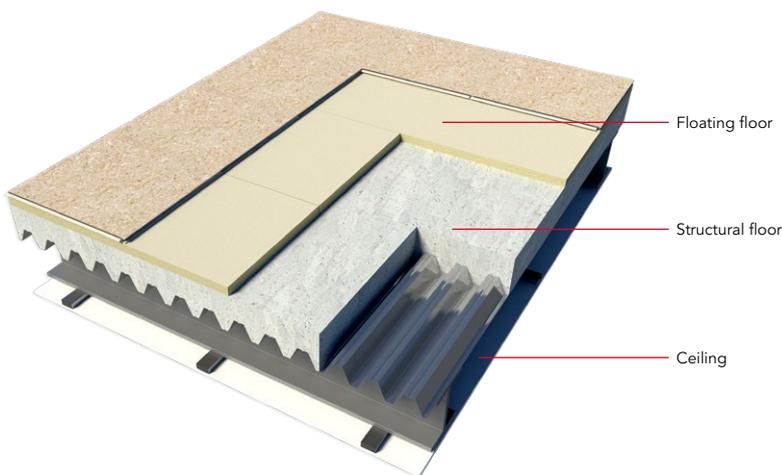

2. Steel-concrete composite - in-situ concrete slab supported by profiled metal deck E-FS-1

Robust Details platform floor finish FFT4:

- T&g flooring board on 30mm ROCKWOOL
- Acoustic ROCKFLOOR®
- Structural floor: In-situ concrete slab, min density
- 2200Kg/m³, supported by profiled metal decking
- Concrete thickness: 80mm (min) at shallowest point and-130mm (min) at deepest point
- Ceiling finish: See Robust Detail handbook for suitable ceiling options

Advisory notes

Laying method

ROCKFLOOR® boards should be laid lengthways to the longest wall, in a staggered joint pattern, tissue face upwards. The offcut at one end of the first row is then used to start the next row and similarly with subsequent rows.

Chipboard

Starting from one corner of the room; lay the boards lengthwise, parallel to the longest wall with the gap maintained against the adjacent walls. The boards should be laid with staggered joints working towards the opposite corner of the room.

The final boards must be cut to maintain the appropriate gap against the wall.

Edge detail

To allow for expansion of the chipboard, a minimum 10mm wide gap should be provided around the room perimeter. This gap should be packed with neoprene isolating strips. Where acoustic insulation is required, a gap of approximately 5mm should be left between the chipboard and the bottom edge of the skirting

Thresholds


At thresholds, stair landings or where a change in floor construction occurs, the insulation should be cut back and a timber batten of the same thickness as the insulation should be inserted to reinforce the edge.

Where acoustic insulation is required, the batten thickness should be reduced to include a 6mm thick neoprene isolation strip that is bonded to it.

Specification clauses

The following NBS clauses include ROCKFLOOR:

E20:30, E20:200, K11:25, K11:215, K11:225, K11:235, K:11:245, K21:111, M10:40, M10:290, M10:295, M13:20, M13:260, M13:265

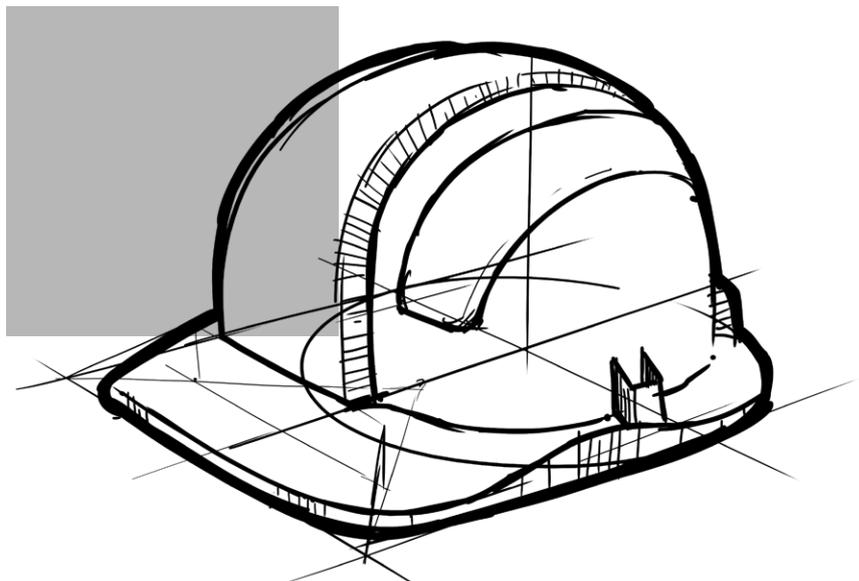

Sustainability

As an environmentally conscious company, ROCKWOOL promotes the sustainable production and use of insulation and is committed to a continuous process of environmental improvement.

All ROCKWOOL products provide outstanding thermal protection as well as four added benefits:



Fire resistance



Acoustic comfort



Sustainable materials



Durability

Environment

Made from a renewable and plentiful naturally occurring resource, ROCKWOOL insulation saves fuel costs and energy in use and relies on trapped air for its thermal properties.


ROCKWOOL insulation does not contain (and has never contained) gases that have ozone depletion potential (ODP) or global warming potential (GWP).

ROCKWOOL is approximately 97% recyclable. For waste ROCKWOOL material that may be generated during installation or at end of life, we are happy to discuss the individual requirements of contractors and users considering returning these materials to our factory for recycling.

Health & Safety

The safety of ROCKWOOL stone wool is confirmed by current UK and Republic of Ireland health & safety regulations and EU directive 97/69/EC: ROCKWOOL fibres are not classified as a possible human carcinogen.

A Material Safety Data Sheet is available and can be downloaded from www.rockwool.co.uk to assist in the preparation of risk assessments, as required by the Control of Substances Hazardous to Health Regulations (COSHH).

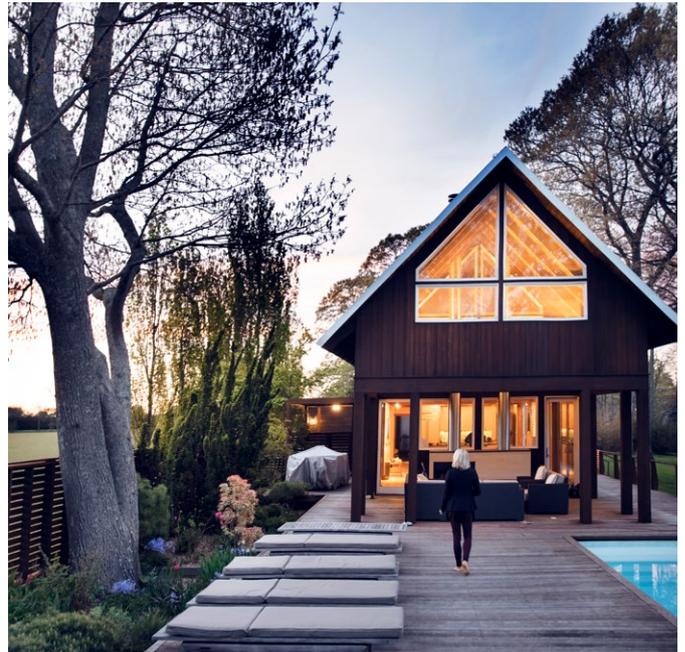

Interested?

For further information, contact the Technical Solutions Team on 01656 868490 or email technical.solutions@rockwool.co.uk

Visit www.rockwool.co.uk to view our complete range of products and services.

Copyright ROCKWOOL September 2018.

The ROCKWOOL Trademark

ROCKWOOL® - our trademark

The ROCKWOOL trademark was initially registered in Denmark as a logo mark back in 1936. In 1937, it was accompanied with a word mark registration; a registration which is now extended to more than 60 countries around the world.

The ROCKWOOL trademark is one of the largest assets in the ROCKWOOL Group, and thus well protected and defended by us throughout the world.

If you require permission to use the ROCKWOOL logo for your business, advertising or promotion. You must apply for a Trade Mark Usage Agreement. To apply, write to:
marketcom@rockwool.com.

Trademarks

The following are registered trademarks of the ROCKWOOL Group:

ROCKWOOL®

ROCKCLOSE®

RAINSCREEN DUO SLAB®

HARDROCK®

ROCKFLOOR®

FLEXI®

BEAMCLAD®

FIREPRO®

Disclaimer

ROCKWOOL Limited reserves the right to alter or amend the specification of products without notice as our policy is one of constant improvement. The information contained in this brochure is believed to be correct at the date of publication. Whilst ROCKWOOL will endeavour to keep its publications up to date, readers will appreciate that between publications there may be pertinent changes in the law, or other developments affecting the accuracy of the information contained in this brochure. The applications referred to within the brochure do not necessarily represent an exhaustive list of applications. ROCKWOOL Limited does not accept responsibility for the consequences of using ROCKWOOL in applications different from those described within this brochure. Expert advice should be sought where such different applications are contemplated, or where the extent of any listed application is in doubt.

© ROCKWOOL 2018. All rights reserved.

Photography and Illustrations

The product illustrations are the property of ROCKWOOL Ltd and have been created for indicative purposes only.

Unless indicated below, the photography and illustrations used in this guide are the property of ROCKWOOL Limited. We reserve all rights to the usage of these images.

If you require permission to use ROCKWOOL images, you must apply for a Usage Agreement. To apply, write to:
marketcom@rockwool.com.

September 2018

ROCKWOOL Limited

Pencoed
Bridgend
CF35 6NY

Tel: 01656 862 621

info@rockwool.co.uk

rockwool.co.uk

