


# STEICO *multi tape black*

High performance tape with special surface

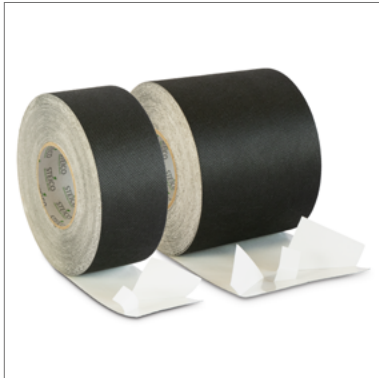

**High performance black tape with surface that can be plastered, for internal and external use**

- Solvent-free
- Can be processed from -10 °C, temperature resistant between -40° and +100°C
- High UV and ageing resistance
- High moisture resistance/ rainproof
- With split release paper for the simple formation of e.g. corner bonds

## Application area



- Joint and connection bonding of STEICO wood fibre boards in combination with STEICO *multi primer*
- Joint and connection bonding with STEICO *universal black*
- Connection bonding for STEICO *fix* and STEICO *tri* sub-window sills

## Technical data

Temperature resistance [°C]	-40 / +100
Processing temperature [°C]	≥ -10; substrate must be dry and free of ice
Minimum roof pitch [°]	10
Adhesive	Acrylic dispersion, solvent-free
Adhesive backing	UV-stabilized special fleece, adhesive on one side
Colour	Black without print
Thickness (without release paper) [mm] (approx.)	0,6
UV resistance [months]	6 months (before applying the façade cladding)
Peeling strength	complies with DIN 4108-1
Peel strength after ageing	complies with DIN 4108-11
s <sub>d</sub> -value [m]	1,5

## Forms of delivery

Length [mm]	Width [mm]	Release liner perforation [mm]	Number/pack. [pcs.]
25000	70	20/50	8
25000	140	50/20/70	4

# STEICO *multi tape black*

High performance tape with special surface

## Weight and packing

Length [mm]	Width [mm]	Weight/m <sup>2</sup> [kg]	Weight/pcs. [kg]	Weight/pack. [kg]	Packaging/pack. Paper/cardboard (approx.) [kg]
25000	70	0.65	0.8	7.50	0.80
25000	140	0.65	1.6	7.50	1.20

## Notes

### Storage

- Store in a cool and dry place at +5 to +25 °C
- Protect from heat, cold and UV radiation

### Ingredients

- Acrylic dispersion (solvent-free), UV-stabilized special fleece

### Disposal

- dispose with normal construction waste, observe applicable legal guidelines

### Cutting

- Sharp knife or other suitable cutting tool

## Installation

### Application in the STEICO membrane system

- Substrates must be stable, dry and free of dust and grease.
- Align STEICO *multi tape black*, remove the release paper step by step, and rub the tape down firmly.
- Slit release paper makes it easier to bond corners, as liners can be removed in turn as required.
- Apply STEICO *multi tape black* without tension or creases.
- If tensile forces occur, the substrate must also be mechanically fastened.
- Bonds must not be in standing water. Bonding in sauna and swimming pool construction is also not permitted.

### Installation on STEICO wood fibre boards

- Pre-treat STEICO wood fibre boards in the bonding area with STEICO *multi primer*.
- After sufficient flash-off time (if primer is transparent), apply STEICO *multi tape black*, remove release paper and rub on.
- The bonding area per butt joint side must be at least 50 mm.
- To improve adhesion, additional pressing with a paint roller or roofing roller is recommended
- Once the adhesive tape has been applied, it can be plastered over

## Certificates and quality management



# STEICO *multi tape black*

High performance tape with special surface

## ☰ Caption

### other abbreviations

**pal.** Pallet

**T&G** Tongue and Groove

**pac.** Packaging

**approx.** Approximately

### **Responsible for content**

STEICO SE

Otto-Lilienthal-Ring 30

85622 Feldkirchen

Germany

Web: [www.steico.com](http://www.steico.com)

Mail: [info@steico.com](mailto:info@steico.com)

**Version: 1**

**Date: 2025-05-23**

The contents of this document have been prepared with the utmost care. However, applicable regulations can change. STEICO accepts no liability for the accuracy, completeness, or current applicability of the content. Application areas may vary in the detailing. Always verify the suitability of our products for the specific intended use.

The contents of this document have been prepared in consideration of European product standards and provide a general overview of component structures, construction methods, and installation. Local applicable regulations have not been considered. Before using our products, please verify that the applicable regulations for the specific area of use are followed.

The currently valid version can be found at: [www.steico.com/tds\\_steicomulti\\_tapeblack\\_eur\\_en](http://www.steico.com/tds_steicomulti_tapeblack_eur_en)